



# 2010 AUTOMOTIVE TIRE CATALOG





MAXXIS USA - ATLANTA

Founded in 1967, Cheng Shin Rubber Ind. Co., Ltd, d/b/a Maxxis International began as a manufacturer of bicycle tires in Taiwan. Growing steadily, Maxxis eventually became the largest manufacturer of bicycle tires in the world — as it is today.

In the ensuing decades, Maxxis has expanded into new market segments, offering products for motorcycles, ATVs, lawn & garden products, race karts, industrial vehicles, trailers, autos, light trucks, trucks and buses.

Today, Maxxis is truly a global company, with operations in Taiwan, China, Thailand, Vietnam, the United States, Canada, Great Britain, Germany, Holland, Japan and Dubai. Maxxis has opened many new factories and distribution facilities and serves consumers in approximately 150 countries.


But no matter how large we become, the people at Maxxis will always remember that creating and retaining lifelong customers is our primary purpose.




MAXXIS TECHNOLOGY CENTER - ATLANTA, USA



R&D CENTER - YUANLIN, TAIWAN

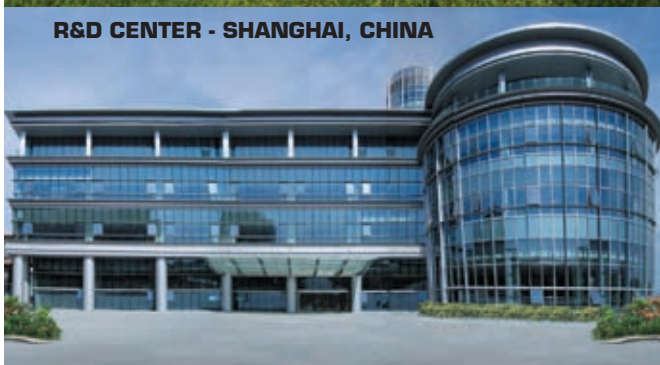

R&D CENTER - SHANGHAI, CHINA

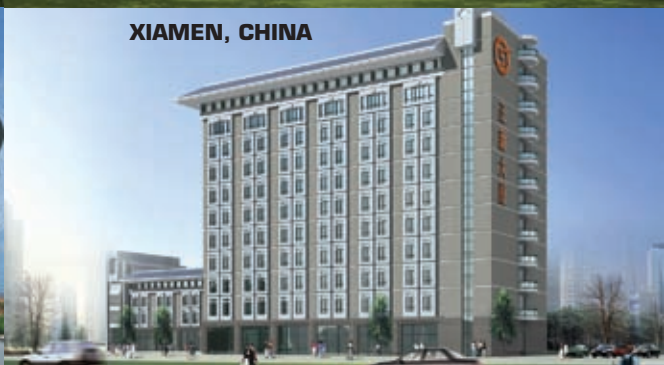

XIAMEN, CHINA

- Original equipment supplier to **Ford, GM, Toyota, Nissan, Volkswagen, Mitsubishi** and **Hyundai** in Asia
- Original equipment supplier of *motorcycle* tires to **Yamaha, Honda, Suzuki** and **Kawasaki**
- Original equipment supplier of *ATV* tires to **Honda, Yamaha, Suzuki, Kawasaki, Polaris** and **KTM**
- Original equipment supplier of *bicycle* tires to **Cannondale, Giant, Merida, Yeti, Iron Horse, Kona** and **Orange**
- Original equipment supplier of *scooter* tires to **Yamaha, Suzuki, Aprilia, Malaguti, Piaggio, MBK, Gilera** and **Kymco**

Ultra High Performance	Application	
M36	Ultra High Performance Radial	3
M35 <b>Victra Asymmet</b>	Ultra High Performance Radial	4
MA-Z4S <b>Victra Z4S</b>	All-Season Ultra High Performance Radial	5
MA-Z1 <b>Victra Z1</b>	Ultra High Performance Radial	7
MA-V1	High Performance Radial	9
MA-501	Ultra High Performance Radial	11
MA i-Pro <b>Victra i-Pro</b>	Ultra High Performance Radial	12
MS800 <b>Waltz</b>	Ultra High Performance Radial	13
MS300 <b>Waltz</b>	Ultra High Performance Radial	15
ZR9 <b>Victra ZR9</b>	Ultra High Performance Radial	16

Passenger		
MA-1	Touring Radial	17
MA-202	Touring Radial	18
MA-P1	Performance Touring	19
MA-T1 <b>Escapade</b>	Premium Touring	22

Light Truck		
MA-S1 <b>Marauder</b>	Performance SUV/LT	23
MA-S2 <b>Marauder II</b>	Performance SUV/LT	24
HP-600	All-Season Highway	25
HT-750	All-Season Highway	26
HT-760	All-Season Highway	27
UE-168(N)	Commercial Highway	28
MA-751	All-Terrain	29
MA-761	All-Terrain	30
AT-771	All-Terrain	31
MT-753	Radial Mud Terrain	32
MT-754 <b>Buckshot Mudder</b>	Radial Mud Terrain	33
MT-762 <b>Bighorn</b>	Radial Mud Terrain	34

Off-Road		
M8060 <b>Trepador</b>	Extreme Off-Road	35
M8090 <b>Creepy Crawler</b>	Bias Extreme Off-Road	36

Trailer		
M8008	ST Radial	38

Winter		
MA-STL <b>Presa Ice</b>	Ice/Snow Terrain	39
MA-AS	All-Season Performance Radial	40
MA-PW <b>Presa Snow</b>	Performance Snow Terrain	41
MA-SPW <b>Presa Spike</b>	Performance Snow Terrain	43
MA-SW <b>Victra Snow SUV</b>	High Performance SUV/LT Snow Terrain	44
MA-SUW <b>Presa Spike</b>	Performance SUV	45
MA-W2 <b>Wintermaxx</b>	Commercial LT	46
MA-SLW <b>Presa Spike</b>	Commercial LT	47
MA-LAS <b>VanPro AS</b>	Radial Mud Terrain	48
MA-SAS <b>Victra SUV</b>	Performance Radial	49
SS-01 <b>Presa SUV</b>	Radial Mud Terrain	50

Safety		
		51-54

- Ultra High Performance tire designed for luxury sport-sedans
- Solid center rib with siping designed for high-speed stability and extra traction
- Continuous outer shoulder design enhances cornering stability
- Four wide circumferential grooves provide excellent hydroplaning resistance and wet traction
- Jointless spiral-wrapped full nylon cap ply for added strength and durability
- Innovative tread compound promotes outstanding wet and dry traction
- UTQG 240 AA A



Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TP23852900	195/55R15	85V	BSW	23.5	7.8	6.0	10/32	1135	44
TP38018600	195/60R15	88V	BSW	24.2	7.9	6.0	10/32	1235	44
TP23970900	195/65R15	91V	BSW	24.9	7.8	6.0	10/32	1356	44
TP38057300	205/60R15	91V	BSW	24.7	8.1	6.0	10/32	1356	44
TP15776500	205/65R15	94V	BSW	25.5	8.2	6.0	10/32	1477	44
TP00137400	205/55ZR16	94W XL	BSW	25.0	8.2	6.5	10/32	1477	50
TP39720200	215/55R16	97W XL	BSW	25.3	8.9	7.0	10/32	1609	50
TP40906900	215/60ZR16	99W	BSW	26.2	8.5	6.5	10/32	1709	44
TP00053200	225/55ZR16	99W XL	BSW	25.7	9.1	7.0	10/32	1709	50
TP42395600	205/50R17	89V	BSW	25.3	8.3	6.5	10/32	1279	50
TP42395100	205/50ZR17	93W XL	BSW	25.3	8.3	6.5	10/32	1433	50
TP41990300	215/45R17	87V	BSW	24.7	8.4	7.0	10/32	1201	50
TP41990900	215/45ZR17	91W XL	BSW	24.7	8.4	7.0	10/32	1356	50
TP42398700	215/50ZR17	95W XL	BSW	25.6	8.7	7.0	10/32	1521	50
TP00359200	215/55R17	98W XL	BSW	26.4	8.9	7.0	10/32	1653	50
TP25715900	225/65R17	102V	BSW	28.5	8.8	6.5	10/32	1874	44
TP00121200	225/40ZR18	92W XL	BSW	25.1	9.1	8.0	10/32	1389	50
TP43136000	225/45ZR18	91W	BSW	25.9	8.8	7.5	10/32	1356	50
TP43139000	225/45ZR18	95W XL	BSW	25.9	8.8	7.5	10/32	1521	50
TP43030200	235/60ZR18	107W	BSW	29.1	9.5	7.0	10/32	2149	44
TP43105200	245/40ZR18	97W XL	BSW	25.7	9.8	8.5	10/32	1609	50
TP43108200	245/50ZR18	104W XL	BSW	27.6	9.8	7.5	10/32	1984	50
TP43118300	255/55ZR18	109W XL	BSW	29.1	10.2	8.0	10/32	2270	50
TP00066200	245/45ZR19	102W	BSW	27.7	9.5	8.0	10/32	1874	50

- Ultra High Performance tire designed for luxury sport-sedans
- Asymmetrical non-directional tread pattern allows cross-rotation to maintain noise performance throughout the life of the tire
- Semi-continuous inner ribs offer extra stability during braking and acceleration
- Four wide circumferential grooves improve hydroplaning resistance
- Computer-optimized tread block arrangement and pitch sequence offer a quiet and refined ride
- Jointless spiral-wound cap ply maximizes ride refinement and durability
- Innovative silica tread compound promotes outstanding wet and dry traction
- UTQG 280 AA A for 55 and lower series
- UTQG 280 A A for 60 and higher series



Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TP23839000	195/45ZR15	78W	BSW	21.9	7.8	6.5	10/32	937	44
TP38028000	195/50R15	86V XL	BSW	22.7	7.7	6.0	10/32	1168	50
TP23842100	195/50R15	82V	BSW	22.7	7.7	6.0	10/32	1477	50
TP23852400	195/55R15	85V	BSW	23.4	7.9	6.0	10/32	1135	44
TP38016000	195/60R15	88V	BSW	24.4	7.8	6.0	10/32	1235	44
TP23983000	195/65R15	95V XL	BSW	25.1	8.0	6.0	10/32	1521	50
TP38055600	205/60R15	91V	BSW	24.8	8.1	6.0	10/32	1356	44
TP15768800	205/65R15	95V	BSW	25.6	8.1	6.0	10/32	1521	44
TP39608000	195/50R16	88V XL	BSW	23.7	7.8	6.0	10/32	1235	50
TP39609100	195/55R16	91V XL	BSW	24.4	7.8	6.0	11/32	1356	50
TP39586300	205/45ZR16	87W XL	BSW	23.2	8.3	7.0	10/32	1201	50
TP39651000	205/50ZR16	91W XL	BSW	24.1	8.3	6.5	10/32	1356	50
TP39701800	205/55ZR16	94W XL	BSW	24.9	8.3	6.5	10/32	1477	50
TP39720000	215/55ZR16	97W XL	BSW	25.1	8.9	7.0	10/32	1609	50
TP00052000	225/50ZR16	96W XL	BSW	24.8	9.1	7.0	10/32	1565	50
TP00053100	225/55ZR16	99W XL	BSW	25.6	9.2	7.0	10/32	1709	50
TP00112100	205/40ZR17	84Y XL	BSW	23.5	8.3	7.5	10/32	1102	50
TP00112200	205/40ZR17	84W XL	BSW	23.6	8.6	7.5	10/32	1102	50
TP39587700	205/45ZR17	88W XL	BSW	24.3	8.3	7.0	10/32	1235	50
TP42398500	205/50ZR17	93W XL	BSW	25.2	8.3	6.5	10/32	1433	50
TP42505800	215/40ZR17	87W XL	BSW	23.9	8.7	7.5	10/32	1201	50
TP41991000	215/45ZR17	91W XL	BSW	24.7	8.3	7.0	11/32	1356	50
TP41991200	215/45ZR17	91Y XL	BSW	24.7	8.4	7.0	11/32	1356	50
TP42398600	215/50ZR17	95W XL	BSW	25.5	8.8	7.0	10/32	1521	50
TP41991800	225/45ZR17	94W XL	BSW	25.0	8.9	7.5	10/32	1477	50
TP41991600	225/45ZR17	94Y XL	BSW	25.0	8.9	7.5	10/32	1477	50
TP41993000	225/50ZR17	98W XL	BSW	25.8	9.1	7.0	11/32	1653	50
TP41993200	225/50ZR17	98Y XL	BSW	25.8	9.1	7.0	11/32	1653	50
TP42431000	225/55ZR17	101W XL	BSW	26.7	9.3	7.0	10/32	1819	50
TP41993800	235/45ZR17	97W XL	BSW	25.3	9.3	8.0	10/32	1609	50
TP41993600	235/45ZR17	97Y XL	BSW	25.3	9.3	8.0	10/32	1609	50
TP42102800	245/40ZR17	95W XL	BSW	24.7	9.9	8.5	10/32	1521	50
TP42021000	245/45ZR17	99W XL	BSW	25.6	9.7	8.0	10/32	1709	50
TP43131000	215/35ZR18	84W XL	BSW	23.9	8.7	7.5	10/32	1102	50
TP43102500	225/40ZR18	92W XL	BSW	25.2	9.3	8.0	10/32	1389	50
TP43107000	235/40ZR18	95W XL	BSW	25.6	9.7	8.5	10/32	1521	50
TP43107500	245/40ZR18	97W XL	BSW	27.6	9.7	8.5	10/32	1609	50
TP43108000	245/50ZR18	100W	BSW	27.6	9.8	7.5	11/32	1764	44
TP43142000	225/35ZR19	88W XL	BSW	25.4	9.3	8.0	10/32	1235	50
TP43145000	235/35ZR19	91W XL	BSW	25.5	9.7	8.5	10/32	1356	50

BSW - Black Sidewall

OWL - Outline White Letter

OBL - Outline Black Letter

XL - Extra Load

Sizes may be limited by market.

BSW - Black Sidewall

OWL - Outline White Letter

OBL - Outline Black Letter

XL - Extra Load

Sizes may be limited by market.

- Ultra High Performance All-Season tire designed for drivers that demand sporty handling with all-season traction
- Solid center rib designed for high-speed stability
- V-shaped unidirectional grooves for improved handling on dry and wet roads
- Multiple snow-biting grooves and optimal siping design for great traction on snowy surfaces
- 4 high-void, circumferential main grooves expel water for enhanced wet traction
- 5-pitch tread blocks and 2-in-1 groove designs minimize noise for a quiet, comfortable ride
- M&S All-Season rated
- UTQG 420 AA A
- UTQG for SUV TBA



Part #	Tire Size	Service Description / Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TP23843300	195/50R15	86V	BSW	22.7	7.8	6.0	10/32	1168	50
TP23856400	195/55R15	85V	BSW	23.5	7.8	6.0	10/32	1135	44
TP23846600	205/50R15	89V XL	BSW	23.1	8.3	6.5	10/32	1279	50
TP39311000	225/50R15	95V XL	BSW	23.9	9.1	7.0	10/32	1521	50
TP39605000	195/50R16	88V XL	BSW	23.7	7.8	6.0	10/32	1235	50
TP39580900	205/40ZR16	83W	BSW	22.4	8.2	7.5	10/32	1074	50
TP39585900	205/45ZR16	87W	BSW	23.4	8.2	7.0	10/32	1201	50
TP39633700	205/50R16	91V XL	BSW	24.1	8.4	6.5	10/32	1356	50
TP40915400	205/55R16	94V	BSW	24.9	8.3	6.5	10/32	1477	50
TP40903500	215/55R16	97V XL	BSW	25.3	8.8	7.0	10/32	1609	50
TP39625000	225/50R16	96V XL	BSW	24.9	9.1	7.0	10/32	1565	50
TP40919900	225/55R16	99V XL	BSW	25.8	9.1	7.0	10/32	1709	50
TP39643000	245/50R16	97V	BSW	25.7	9.8	7.5	10/32	1609	44
TP42503600	205/40ZR17	84W	BSW	23.5	8.2	7.5	10/32	1102	50
TP39586700	205/45ZR17	88W XL	BSW	24.3	8.0	7.0	10/32	1235	50
TP42395400	205/50ZR17	93W XL	BSW	25.1	8.3	6.5	10/32	1433	50
TP42505600	215/40ZR17	87W	BSW	23.8	8.5	7.5	10/32	1201	50
TP41990600	215/45ZR17	91W	BSW	24.8	8.3	7.0	10/32	1356	50
TP42401300	215/50ZR17	95W	BSW	25.6	8.8	7.0	10/32	1521	50
TP39588600	225/45ZR17	94W	BSW	25.1	8.7	7.5	10/32	1477	50
TP42407600	225/50ZR17	98W	BSW	25.8	9.1	7.0	10/32	1653	50
TP42411300	225/55ZR17	101W XL	BSW	26.8	9.1	7.0	10/32	1819	50
TP42002600	235/45ZR17	97W	BSW	25.4	9.2	8.0	10/32	1609	50
TP42102400	245/40ZR17	95W XL	BSW	24.7	9.8	8.5	10/32	1521	50
TP42018000	245/45ZR17	99W	BSW	25.7	9.5	8.0	10/32	1708	50
TP42514200	255/40ZR17	98W XL	BSW	25.0	10.1	9.0	10/32	1653	50
TP43126000	215/35ZR18	84W	BSW	23.9	8.6	7.5	10/32	1102	50
TP43101600	225/40ZR18	92W	BSW	25.2	9.1	8.0	10/32	1389	50
TP43107400	235/40ZR18	95W XL	BSW	25.4	9.4	8.5	10/32	1521	50
TP43026000	235/55ZR18	104W XL	BSW	28.3	9.5	7.5	-	1984	-
TP43030400	235/60ZR18	107W	BSW	29.1	9.5	7.0	-	2149	-
TP43107800	245/40ZR18	97W	BSW	25.7	9.8	8.5	10/32	1609	50
TP43266000	255/50ZR19	107W XL	BSW	29.1	10.3	8.0	-	2150	-
TP43268000	255/55ZR19	111W	BSW	30.0	10.2	8.0	-	2405	-
TP00057300	225/30ZR20	85W	BSW	25.4	9.1	8.0	10/32	1135	50
TP00041500	225/35ZR20	90W XL	BSW	26.2	9.1	8.0	10/32	1323	50
TP45100600	245/35ZR20	95W	BSW	26.5	9.7	8.5	10/32	1521	50
TP45103000	255/35ZR20	97W	BSW	27.0	10.0	9.0	10/32	1609	50
TP00147300	245/30ZR22	92W	BSW	27.8	9.8	8.5	10/32	1389	50
TP00150100	255/30ZR22	95W	BSW	28.1	10.2	9.0	10/32	1521	50
TP00167300	255/30ZR24	97W	BSW	30.1	10.2	9.0	10/32	1609	50

MA-Z4S SUV									
TP43155600	255/45R20	105V	BSW	29.1	10.0	8.5	11/32	2039	50
TP00271300	275/40R20	106V	BSW	28.7	10.9	9.5	11/32	2094	50
TP45311200	275/45R20	110V	BSW	29.8	10.7	9.0	11/32	2337	50
TP45317000	275/55R20	117V	BSW	31.9	11.2	8.5	11/32	2833	50
TP45320400	285/50R20	116V	BSW	31.3	11.7	9.0	11/32	2756	50
TP00170100	265/35ZR22	102W	BSW	29.3	10.7	9.5	10/32	1874	50
TP00140300	265/40R22	106V	BSW	30.4	10.7	9.5	11/32	2094	50
TP45406000	305/40R22	114V	BSW	31.6	12.3	11.0	11/32	2601	50
TP45416000	305/45R22	118V	BSW	32.8	11.9	10.0	11/32	2910	50
TP00156200	295/35R24	110V	BSW	32.1	11.9	10.5	11/32	2337	50
TP45501000	305/35R24	114V	BSW	32.4	12.3	11.0	11/32	2601	50

BSW - Black Sidewall      OWL - Outline White Letter      OBL - Outline Black Letter      XL - Extra Load

Sizes may be limited by market.





- All-Season High Performance tire designed for sport touring vehicles
- Non-directional tread pattern designed to offer excellent all-season traction
- Six circumferential grooves offer superior hydroplaning resistance
- Overall construction designed to maximize handling precision and driver confidence
- Jointless spiral-wound cap ply maximizes ride refinement and durability
- M&S All-Season rated
- UTQG 320 A A



Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TP23909000	<b>205/65R14</b>	91H	BSW	24.5	8.3	6.0	10/32	1356	36
TP18252000	<b>185/55R15</b>	81V	BSW	22.9	7.4	6.0	10/32	1019	44
TP23842800	<b>195/50R15</b>	82H	BSW	22.7	7.8	6.0	10/32	1047	44
TP23842500	<b>195/50R15</b>	82V	BSW	22.8	7.8	6.0	10/32	1047	44
TP23851200	<b>195/55R15</b>	85V	BSW	23.4	7.8	6.0	10/32	1135	44
TP39630000	<b>P205/50R16</b>	87V	BSW	24.2	8.3	6.5	10/32	1201	44
TP40900700	<b>205/55R16</b>	91V	BSW	24.8	8.4	6.5	10/32	1356	44
TP40907600	<b>215/55R16</b>	93V	BSW	25.2	8.8	7.0	10/32	1433	44
TP40964200	<b>215/60R16</b>	99V XL	BSW	26.1	8.7	6.5	10/32	1709	50
TP40980800	<b>215/65R16</b>	98H	BSW	26.9	8.6	6.5	10/32	1653	44
TP40994400	<b>225/60R16</b>	98V	BSW	26.6	9.0	6.5	10/32	1653	44
TP39640000	<b>P245/50R16</b>	97V	BSW	25.6	9.9	7.5	10/32	1609	44
TP42502900	<b>P205/40R17</b>	80V	BSW	23.6	8.3	7.5	10/32	992	44
TP41990000	<b>P215/45R17</b>	87V	BSW	24.6	8.3	7.0	10/32	1201	44
TP42400800	<b>215/50R17</b>	91V	BSW	25.6	8.7	7.0	10/32	1356	44
TP42405800	<b>225/55R17</b>	101V XL	BSW	26.9	9.0	7.0	10/32	1819	50
TP42002000	<b>P235/45R17</b>	93V	BSW	25.3	9.3	8.0	10/32	1433	44
TP42012000	<b>P245/45R17</b>	95V	BSW	25.5	9.5	8.0	10/32	1521	44
TP42022000	<b>P255/45R17</b>	98V	BSW	26.2	10.0	8.5	11/32	1653	44



- Ultra High Performance tire designed for driving enthusiasts
- Directional tread pattern features large semi-continuous shoulder blocks to maximize contact patch under spirited driving
- Solid center rib offers extra stability and confidence at higher speeds
- Enhanced sidewall design with a hard bead filler maximizes steering feedback and lateral stability
- Four wide circumferential grooves improve hydroplaning resistance
- Jointless spiral-wound cap ply maximizes ride refinement and durability
- UTQG 240 AA A

Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TP00420100	<b>185/60R15</b>	88V XL	BSW	23.7	7.4	5.5	10/32	1235	50
TP00113100	<b>195/50R15</b>	86V XL	BSW	22.7	7.7	6.0	9/32	1168	50
TP00114100	<b>195/55R15</b>	85V	BSW	23.4	7.6	6.0	9/32	1135	44
TP00435100	<b>195/60R15</b>	88V	BSW	24.2	7.9	6.0	10/32	1235	44
TP00412100	<b>205/60R15</b>	95V XL	BSW	24.7	8.2	6.0	10/32	1521	50
TP00431100	<b>215/65R15</b>	100V XL	BSW	26.0	8.8	6.5	9/32	1764	50
TP00362100	<b>195/55R16</b>	91V XL	BSW	24.4	7.9	6.0	9/32	1356	50
TP00136100	<b>205/45ZR16</b>	87W XL	BSW	23.2	8.3	7.0	9/32	1202	50
TP00343100	<b>205/50ZR16</b>	91W	BSW	24.1	8.4	6.5	10/32	1201	44
TP00111100	<b>205/55ZR16</b>	94W XL	BSW	24.9	8.2	6.5	9/32	1477	50
TP00428100	<b>215/60R16</b>	99V XL	BSW	26.1	8.7	6.5	10/32	1709	50
TP00354100	<b>225/55ZR16</b>	99W XL	BSW	25.6	9.0	7.0	9/32	1709	50
TP00219100	<b>205/40ZR17</b>	84Y XL	BSW	23.5	8.4	7.5	9/32	1102	50
TP00144100	<b>205/40ZR17</b>	84W XL	BSW	23.5	8.5	7.5	9/32	1102	50
TP00345000	<b>205/45ZR17</b>	88W XL	BSW	24.7	8.3	7.0	9/32	1235	50
TP00130100	<b>215/45ZR17</b>	91W XL	BSW	24.7	8.3	7.0	9/32	1356	50
TP00220100	<b>215/45ZR17</b>	91Y XL	BSW	24.7	8.4	7.0	9/32	1356	50
TP42398300	<b>215/50ZR17</b>	95W XL	BSW	25.4	8.8	6.0	9/32	1521	50
TP50493500	<b>215/55ZR17</b>	98W XL	BSW	26.3	8.7	7.0	9/32	1653	50
TP00134100	<b>225/45ZR17</b>	94W XL	BSW	25.0	8.8	7.5	9/32	1477	50
TP00221100	<b>225/45ZR17</b>	94Y XL	BSW	25.0	8.9	7.5	9/32	1477	50
TP41995600	<b>225/50ZR17</b>	98W XL	BSW	25.9	9.1	6.0	9/32	1653	50
TP42432000	<b>225/55ZR17</b>	101W XL	BSW	26.7	9.0	7.0	9/32	1819	50
TP00129100	<b>235/45ZR17</b>	97W XL	BSW	25.4	9.3	8.0	10/32	1609	50
TP00133100	<b>235/45ZR17</b>	97Y XL	BSW	25.4	9.3	8.0	10/32	1609	50
TP00465100	<b>225/40ZR18</b>	92Y XL	BSW	24.9	9.3	8.0	10/32	1389	50
TP43101800	<b>225/40ZR18</b>	92W XL	BSW	24.9	9.2	8.0	10/32	1389	50
TP43135000	<b>225/45ZR18</b>	95W XL	BSW	25.9	8.9	6.5	10/32	1521	50
TP00466100	<b>235/40ZR18</b>	95Y XL	BSW	25.4	9.5	8.5	10/32	1521	50
TP00135100	<b>235/40ZR18</b>	95W XL	BSW	25.4	9.6	8.5	10/32	1521	50
TP00136600	<b>235/45ZR18</b>	98W XL	BSW	26.3	9.1	8.0	11/32	1653	50
TP39629500	<b>235/50ZR18</b>	101W XL	BSW	27.2	9.6	6.0	10/32	1819	50
TP00609100	<b>245/40ZR18</b>	97W XL	BSW	25.1	9.1	8.0	10/32	1609	50
TP00131100	<b>255/45ZR18</b>	103W XL	BSW	27.0	10.0	8.5	10/32	1929	50
TP00450100	<b>265/35ZR18</b>	97W XL	BSW	25.3	10.4	8.5	10/32	1609	50
TP00449100	<b>265/35ZR18</b>	97Y XL	BSW	25.3	10.4	8.5	10/32	1609	50
TP00506100	<b>275/35ZR18</b>	99W XL	BSW	25.6	10.8	8.5	10/32	1709	50
TP00138100	<b>275/45ZR18</b>	103W XL	BSW	27.8	10.7	9.0	10/32	1929	44
TP00426100	<b>255/40ZR19</b>	100W XL	BSW	25.4	9.5	8.5	10/32	1764	50

- New nano-silica infused compound combined with environmentally friendly oils reduces rolling resistance by 11%\*
- New casing design improves road-impact dampening characteristics and enhances ride comfort
- Computer-aided tread pattern design provides class-leading braking performance and safety
- Multi-pitch technology minimizes pattern noise and increases overall ride refinement
- UTQG 320 A A

\*Internal Testing Conditions




**FDSS Rubber:** Highly dispersible nano-silica fillers interact with functional groups on rubber chains - strengthening filler-rubber interaction for lower rolling resistance.

**Fuel Economy:** Lower rolling resistance means less fuel consumption and smog emissions from vehicle.



**Environmental Concerns:** Use of environmentally-friendly oils helps the MS800 to surpass European environmental standards and minimize environmental threat.

Part #	Tire Size	Service Description / Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TP00441100	175/70R13	82H	BSW	22.7	7.0	5.0	8/32	1047	44
TP00631100	185/60R14	82V	BSW	22.8	7.4	5.5	8/32	1047	44
TP00637100	185/65R15	88H	BSW	24.4	7.4	5.5	8/32	1235	44
TP00382100	195/55R15	85V	BSW	23.4	7.9	6.0	8/32	1135	44
TP00404100	195/60R15	88V	BSW	24.2	7.9	6.0	8/32	1235	44
TP00139100	195/65R15	88H	BSW	24.2	7.9	6.0	8/32	1235	44
TP00518300	195/65R15	88V	BSW	24.2	7.9	6.0	8/32	1235	44
TP00381100	205/65R15	95V	BSW	25.5	8.2	6.0	8/32	1521	44
TP00624100	225/60R15	96V	BSW	25.6	9.0	6.5	8/32	1565	44
TP00383100	195/55R16	87V	BSW	24.4	7.9	6.0	8/32	1201	44
TP00358100	205/55R16	91V	BSW	24.9	8.4	6.5	8/32	1356	44
TP00357100	205/60R16	92V	BSW	25.7	8.2	6.0	8/32	1389	44
TP00590100	215/55R16	97V XL	BSW	25.3	8.9	7.0	8/32	1609	50
TP00386100	215/60R16	95V	BSW	26.1	8.7	6.5	8/32	1521	44
TP39589300	205/45ZR17	84W	BSW	24.3	8.1	7.0	8/32	1102	44
TP41994800	215/45ZR17	91W	BSW	24.6	8.4	7.0	8/32	1356	50
TP42413400	215/50R17	95V	BSW	25.5	8.9	7.0	8/32	1521	50
TP00359100	215/55R17	94V	BSW	26.3	8.9	7.0	8/32	1477	44
TP00657100	225/50ZR17	98W XL	BSW	25.9	9.2	7.0	8/32	1653	50
TP00605100	225/55R17	97V	BSW	26.8	9.2	7.0	8/32	1609	44
TP43122000	225/40ZR18	92W	BSW	25.1	9.1	8.0	8/32	1389	50
TP43135600	225/45ZR18	95W	BSW	25.9	8.9	7.5	8/32	1521	50
TP00136800	235/45ZR18	98W	BSW	26.3	9.3	8.0	8/32	1653	50


BSW - Black Sidewall      OWL - Outline White Letter      OBL - Outline Black Letter      XL - Extra Load  
 Sizes may be limited by market.

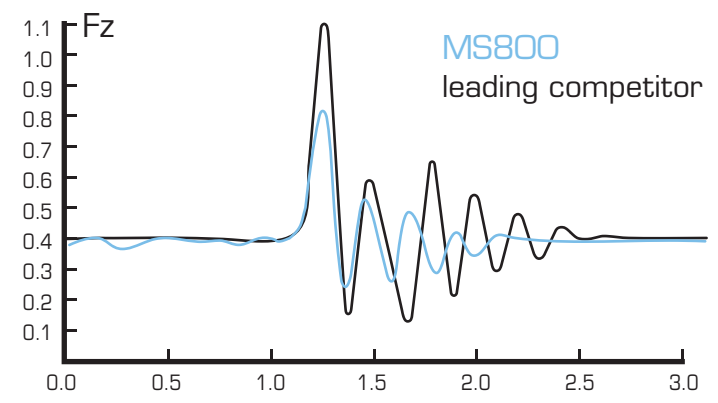

Road imperfections such as expansion joints and potholes are major sources of discomfort and fatigue for a car's occupants. The Maxxis MS800 is designed to absorb and dampen shocks, minimizing impact and disturbance to the interior cabin. As the graph above shows, internal tests prove that the MS800 can absorb shocks better and faster than the leading competitor's tire in its class.

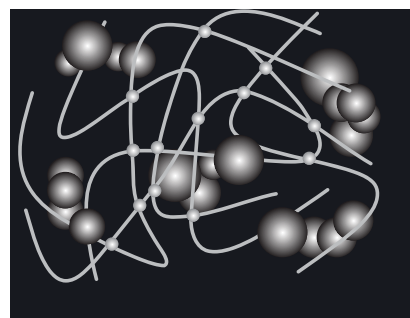
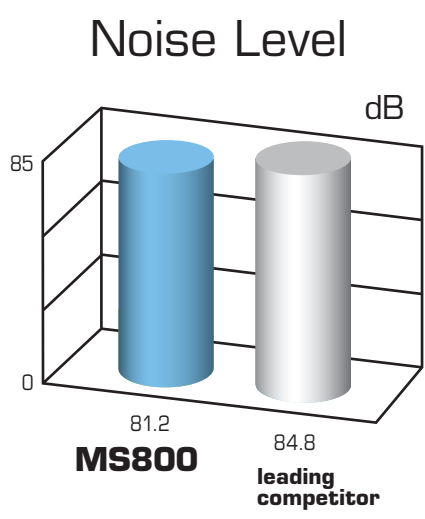


Inferior dispersion allows traditional silica fillers in rubber compounds to cluster together - generating wasted heat.

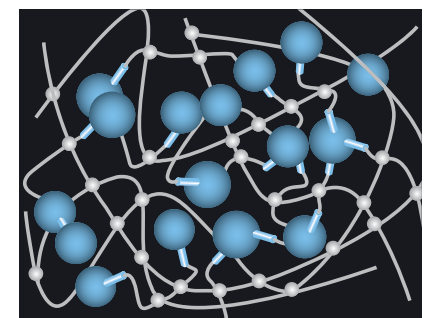


Highly dispersible silica in Maxxis' new FDSS compound promotes excellent filler dispersion - minimizing heat generation and energy dissipation.

The MS800 tire outperforms the leading competitor in braking performance. Internal testing shows the MS800 shortening straight-line braking distance by 5.6 feet in wet conditions (50mph - 0) and 3.9 feet in dry conditions (62mph-0).

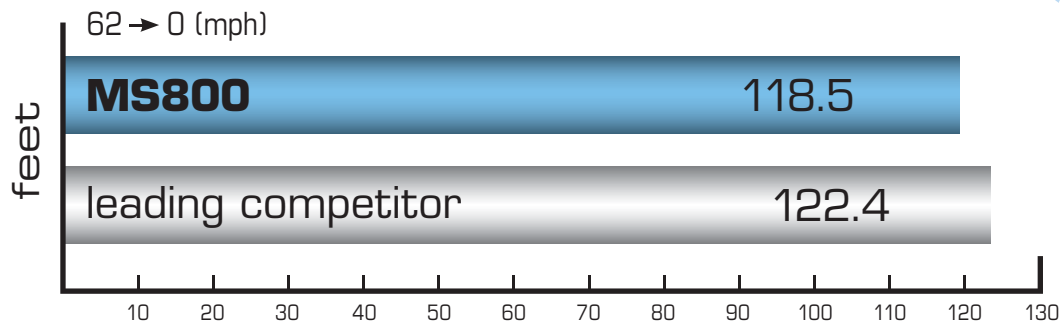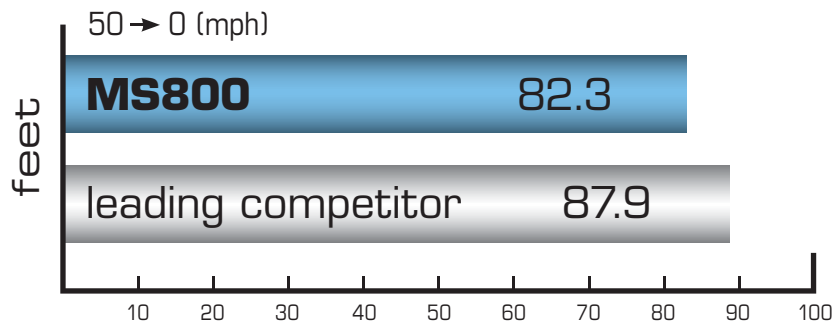

Internal Testing: The MS800 travels 63.4 yards more than the leading competitor's product during a coast-down vehicle test from 50 mph to 25 mph.

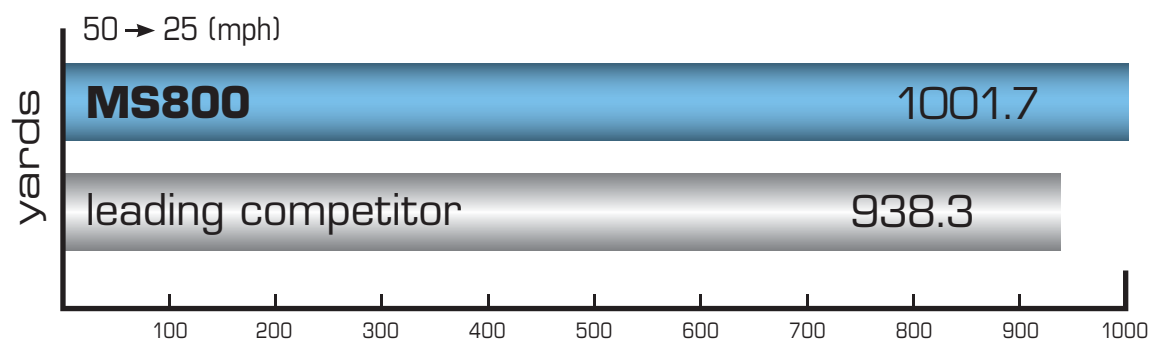



- Ultra High Performance tire designed for premium touring vehicles
- Computer-optimized tread pattern designed to minimize pattern noise
- Semi-continuous outer shoulder design provides improved steering precision and response
- Strategically placed siping enhances wet traction
- 7 circumferential grooves offer superior hydroplaning resistance
- Overall construction design focuses on improving overall driving refinement
- Jointless spiral-wound cap ply maximizes ride refinement and durability
- UTQG 320 A A



Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TP00500100	155/55R14	69V	BSW	25.9	6.1	7.0	10/32	716	44
TP17624600	185/65R14	86H	BSW	23.6	7.3	5.5	10/32	1168	44
TP00127100	195/60R14	86H	BSW	23.2	7.9	6.0	10/32	1168	44
TP18292100	185/60R15	84V	BSW	23.7	7.4	5.5	10/32	1047	44
TP18310600	185/65R15	88V	BSW	24.5	7.5	5.5	10/32	1235	44
TP00109100	195/50R15	86V XL	BSW	22.5	8.3	6.0	10/32	1168	50
TP23853600	195/55R15	85V	BSW	23.4	7.8	6.0	10/32	1135	44
TP38018000	195/60R15	88V	BSW	24.2	7.9	6.0	10/32	1235	44
TP23983200	195/65R15	91V	BSW	25.0	7.8	6.0	10/32	1356	44
TP38055800	205/60R15	91V	BSW	24.7	8.1	6.0	10/32	1356	44
TP15768500	205/65R15	94V	BSW	25.5	8.2	6.0	10/32	1477	44
TP15768600	205/65R15	95V	BSW	25.5	8.2	6.0	10/32	1521	44
TP50191200	205/70R15	96H	BSW	26.3	8.4	6.0	10/32	1565	36
TP26067200	215/70R15	98V	BSW	26.9	8.6	6.5	10/32	1653	44
TP39611000	195/50R16	88V XL	BSW	23.7	7.9	6.0	10/32	1235	50
TP39654000	195/60R16	89V	BSW	25.3	7.8	6.0	10/32	1279	44
TP39702200	205/55ZR16	91W	BSW	25.0	8.2	6.5	10/32	1356	44
TP39702000	205/55R16	91V	BSW	25.0	8.3	6.5	10/32	1356	44
TP40943400	205/60ZR16	92W	BSW	25.7	8.1	6.0	10/32	1389	44
TP40943000	205/60R16	92V	BSW	25.7	8.1	6.0	10/32	1389	44
TP40969800	205/65R16	95V	BSW	26.5	8.2	6.0	10/32	1521	44
TP40907100	215/55ZR16	93W	BSW	25.3	8.8	7.0	10/32	1433	44
TP40955200	215/60ZR16	95W	BSW	26.2	8.5	6.5	10/32	1521	44
TP40955000	215/60R16	95V	BSW	26.2	8.7	6.5	10/32	1521	44
TP40978400	215/65R16	98V	BSW	27.1	8.7	6.5	10/32	1653	44
TP00267100	225/55ZR16	95W	BSW	25.8	9.0	7.0	10/32	1521	44
TP40996400	225/60R16	98V	BSW	26.6	8.9	6.5	10/32	1653	44
TP40996500	225/60ZR16	98W	BSW	26.8	8.9	6.5	10/32	1653	44
TP41014300	235/60ZR16	100W	BSW	27.2	9.4	7.0	10/32	1764	44
TP41014100	235/60R16	100V	BSW	27.1	9.5	7.0	10/32	1764	44
TP39587100	205/45ZR17	84W	BSW	24.3	8.3	7.0	10/32	1102	44
TP00039100	215/45ZR17	91W XL	BSW	24.7	8.3	7.0	10/32	1356	50
TP42398900	215/50R17	95V XL	BSW	25.6	8.7	7.0	10/32	1521	50
TP42404700	215/55R17	94V	BSW	26.3	8.8	7.0	10/32	1477	44
TP42407100	215/55ZR17	94W	BSW	26.4	8.9	7.0	10/32	1477	44
TP00153100	225/50R17	98V XL	BSW	25.9	8.9	7.0	10/32	1653	50
TP00212100	225/65R17	102H	BSW	28.5	8.8	6.5	10/32	1875	44
TP43120000	225/40ZR18	92W XL	BSW	25.1	9.1	8.0	10/32	1389	50
TP43103300	235/40ZR18	95W XL	BSW	25.3	9.7	8.5	10/32	1521	50

BSW - Black Sidewall

OWL - Outline White Letter

OBL - Outline Black Letter

XL - Extra Load

Sizes may be limited by market.

- Recommended for dry road racing applications ONLY
- Tread pattern design increases cornering power and steering response
- Sidewall construction designed to maximize steering response, precision and feedback
- Belt-package optimized to generate maximum cornering power and overall stability
- Special racing compound optimized for excellent heat-cycle, treadwear and traction performance
- High-stiffness overall construction increases handling precision and overall response
- UTQG 100 AA A



Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TP23841000	195/50R15	82V	BSW	22.7	8.0	6.0	6/32	1047	44

BSW - Black Sidewall

OWL - Outline White Letter

OBL - Outline Black Letter

XL - Extra Load

Sizes may be limited by market.

- Double steel-belted construction for long-lasting wear and uniformity
- Jointless spiral-wrapped full nylon cap for added strength and durability
- Superior mileage with a quiet, comfortable ride
- Solid center rib for improved handling and high-quality performance
- Advanced tread design channels out water to resist hydroplaning
- Stylish whitewall with an attractive black serrated sidewall
- M&S All-Season rated
- UTQG 480 A B (70 series)
- UTQG 480 B B (75 series)
- UTQG 420 B B (80 series)



Part #	Tire Size	Service Description / Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TP33200000	<b>P155/80R13</b>	79S	RWW	22.8	6.2	4.5	11/32	959	35
TP34200000	<b>P165/80R13</b>	83S	RWW	23.4	6.7	4.5	11/32	1069	35
TP35011000	<b>P175/80R13</b>	86S	RWW	24.0	7.0	5.0	11/32	1179	35
TP36520000	<b>P185/80R13</b>	90S	RWW	24.7	7.4	5.0	12/32	1323	35
TP27005000	<b>P185/75R14</b>	89S	RWW	25.0	7.3	5.0	11/32	1290	35
TP27008000	<b>P195/75R14</b>	92S	RWW	25.7	7.9	5.5	11/32	1400	35
TP39001000	<b>P205/70R14</b>	93S	RWW	25.4	8.3	6.0	12/32	1433	35
TP27013000	<b>P205/75R14</b>	95S	RWW	26.3	8.1	5.5	11/32	1532	35
TP26050000	<b>P215/70R14</b>	96S	RWW	26.0	8.5	6.5	12/32	1554	35
TP39202000	<b>P205/70R15</b>	95S	RWW	26.4	8.3	6.0	12/32	1499	35
TP27017000	<b>P205/75R15</b>	97S	RWW	27.3	8.1	5.5	11/32	1598	35
TP26058000	<b>P215/70R15</b>	98S	RWW	27.0	8.6	6.5	12/32	1653	35
TP27022000	<b>P215/75R15</b>	100S	RWW	27.8	8.7	6.0	11/32	1742	35
TP25710000	<b>P225/70R15</b>	100S	RWW	27.6	9.2	6.5	12/32	1753	35
TP27025000	<b>P225/75R15</b>	102S	RWW	28.4	8.9	6.0	11/32	1874	35
TP27027000	<b>P235/75R15</b>	105S	RWW	29.0	9.4	6.5	11/32	2039	35

- Jointless spiral-wrapped cap ply for added strength and durability
- Six circumferential grooves for outstanding hydroplaning resistance and wet weather handling
- Full casing reinforcement package for extra durability
- Five rib pattern design for improved wear pattern and reduced pattern noise
- M&S All-Season rated
- UTQG 400 A A
- 280 A B (80 series)



Part #	Tire Size	Service Description / Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TP09788600	<b>155/80R12</b>	77T	BSW	21.9	6.3	4.5	10/32	915	38
TP33152800	<b>155/80R13</b>	79T	BSW	22.8	6.3	4.5	10/32	963	38
TP12377500	<b>165/70R13</b>	79T	BSW	22.3	6.8	5.0	10/32	963	41
TP34008000	<b>165/80R13</b>	83T	BSW	23.5	6.6	4.5	10/32	1074	38
TP20541400	<b>175/70R13</b>	82T	BSW	22.8	6.9	5.0	10/32	1047	44
TP23077400	<b>185/70R13</b>	86T	BSW	23.4	7.5	5.5	10/32	1168	44
TP15703200	<b>175/65R14</b>	82T	BSW	22.9	7.0	5.0	10/32	1047	44
TP15902100	<b>175/70R14</b>	84T	BSW	23.9	6.9	5.0	10/32	1102	41
TP16025800	<b>185/60R14</b>	82H	BSW	22.8	7.3	5.5	10/32	1047	44
TP17634400	<b>185/65R14</b>	86H	BSW	23.4	7.4	5.5	10/32	1168	44
TP23556800	<b>185/70R14</b>	88T	BSW	24.5	7.6	5.5	10/32	1235	44
TP18005300	<b>195/60R14</b>	86H	BSW	23.2	7.9	6.0	10/32	1168	44
TP23902800	<b>195/65R14</b>	89H	BSW	23.9	8.0	6.0	10/32	1433	44
TP24579400	<b>195/70R14</b>	91T	BSW	25.2	8.1	6.0	10/32	1356	44
TP39158600	<b>205/70R14</b>	95T	BSW	25.5	8.4	6.0	10/32	1521	44
TP18293200	<b>185/60R15</b>	84H	BSW	23.7	7.3	5.5	10/32	1102	44
TP18314500	<b>185/65R15</b>	88H	BSW	24.5	7.4	5.5	10/32	1235	44
TP38002400	<b>195/60R15</b>	88H	BSW	24.2	7.9	6.0	10/32	1235	44
TP23956900	<b>195/65R15</b>	91H	BSW	24.9	8.0	6.0	10/32	1356	44
TP38062200	<b>205/60R15</b>	91T	BSW	24.7	8.1	6.0	10/32	1356	44
TP15765900	<b>205/65R15</b>	94T	BSW	25.4	8.3	6.0	10/32	1477	44
TP18451800	<b>215/60R15</b>	94T	BSW	25.2	8.7	6.5	10/32	1477	44
TP39404700	<b>215/65R15</b>	96H	BSW	26.0	8.8	6.5	10/32	1565	44
TP00137900	<b>205/55R16</b>	90H	BSW	25.0	8.4	6.5	10/32	1323	44
TP39720300	<b>215/55R16</b>	93H	BSW	25.3	9.0	7.0	10/32	1433	44
TP40908800	<b>215/60R16</b>	95T	BSW	26.1	8.7	6.5	10/32	1521	44
TP40978300	<b>215/65R16</b>	98T	BSW	27.0	8.8	6.5	10/32	1653	44
TP40996600	<b>225/60R16</b>	98T	BSW	26.6	8.9	6.5	10/32	1653	44
TP40993100	<b>225/60R16</b>	98S	RWW	26.6	8.9	6.5	10/32	1653	44





- All-Season touring tire designed for premium touring vehicles
- Non-directional tread pattern designed to minimize pattern noise
- Specially formulated compound optimized for long wear
- Four high-void circumferential grooves offer excellent hydroplaning resistance
- Overall construction design focuses on maximizing ride refinement
- Jointless spiral-wound cap ply maximizes ride refinement and durability
- M&S All-Season rated
- UTQG 720 A A  
T – speed rating

Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TP20564000	<b>P175/70R13</b>	82T	BSW	22.7	6.8	5.0	11/32	1047	44
TP23129200	<b>P185/70R13</b>	86T	BSW	23.2	7.5	5.5	11/32	1168	44
TP17644200	<b>P185/65R14</b>	86T	BSW	23.5	7.4	5.5	11/32	1168	44
TP23614000	<b>P185/70R14</b>	88T	BSW	24.3	7.4	5.5	11/32	1235	44
TP18207000	<b>P195/60R14</b>	86T	BSW	23.2	7.9	6.0	11/32	1168	44
TP25610000	<b>P195/70R14</b>	91T	BSW	24.8	7.8	6.0	11/32	1356	44
TP39201800	<b>P205/70R14</b>	95T	BSW	25.4	8.2	6.0	11/32	1521	44
TP38008200	<b>P195/60R15</b>	88T	BSW	24.2	7.8	6.0	11/32	1235	44
TP23996200	<b>P195/65R15</b>	91T	BSW	25.0	7.9	6.0	11/32	1356	44
TP38062000	<b>P205/60R15</b>	91T	BSW	24.7	8.3	6.0	11/32	1356	44
TP15786200	<b>P205/65R15</b>	94T	BSW	25.5	8.2	6.0	11/32	1477	44
TP39207200	<b>P205/70R15</b>	96T	BSW	26.3	8.1	6.0	11/32	1565	44
TP39207300	<b>P205/70R15</b>	96T	RWW	26.3	8.2	6.0	11/32	1565	44
TP18456200	<b>P215/60R15</b>	94T	BSW	25.2	8.6	6.5	11/32	1477	44
TP26066200	<b>P215/70R15</b>	98T	BSW	26.9	8.6	6.5	11/32	1653	44
TP26066400	<b>P215/70R15</b>	98T	RWW	26.9	8.6	6.5	11/32	1653	44
TP40902300	<b>P205/55R16</b>	91V	BSW	24.9	8.4	6.5	12/32	1356	44
TP40906200	<b>P215/60R16</b>	95T	BSW	26.1	8.7	6.5	11/32	1521	44
TP41005900	<b>P225/60R16</b>	98T	BSW	26.8	8.9	6.5	11/32	1653	44
TP42410200	<b>P215/60R17</b>	96T	BSW	27.2	8.7	6.5	11/32	1565	44
TP42409000	<b>P215/65R17</b>	99T	BSW	28.0	8.7	6.5	11/32	1709	44
TP41434000	<b>P225/60R17</b>	99T	BSW	27.6	9.0	6.5	11/32	1709	44
TP43024400	<b>P225/60R18</b>	100V	BSW	28.6	9.0	6.5	12/32	1764	44

BSW - Black Sidewall

OWL - Outline White Letter

RWW - Raised Whitewall

XL - Extra Load

Sizes may be limited by market.













- Double steel-belted radial construction for long-lasting wear and uniformity
- Jointless spiral-wrapped full nylon cap for added strength and durability
- Extra strong, durable casing helps resist punctures and abrasions
- Premium rubber compound with tread siping delivers maximum control in various weather conditions
- Pinned for studs
- M&S All-Season rated
- UTQG 380 AB (P-metric sizes only)



Part #	Tire Size	Service Description / Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TP27033200	<b>P235/75R15</b>	105Q	OWL	29.0	9.5	6.5	14/32	2028	35
TL16006000	<b>LT235/75R15</b>	104/101Q 6	OWL	29.0	9.6	6.5	19/32	S1985/D1820	50
TL30177000	<b>LT225/75R16</b>	115/112Q 10	OWL	29.6	8.9	6.0	14/32	S2680/D2469	80
TL30185200	<b>LT235/85R16*</b>	120/116N 10	OBL	31.7	9.6	6.5	19/32	S3042/D2778	80
TL30197000	<b>LT245/75R16</b>	108/104N 6	OWL	30.6	10.0	7.0	20/32	S2205/D2006	50
TL30201000	<b>LT245/75R16*</b>	120/116N 10	OWL	30.6	10.0	7.0	20/32	S3042/D2778	80
TL30216000	<b>LT265/75R16</b>	112/109N 6	OWL	31.8	10.8	7.5	20/32	S2470/D2270	50
TL30216600	<b>LT265/75R16</b>	119/116Q 8	OWL	31.8	10.8	7.5	20/32	S3000/D2755	65
TL30216800	<b>LT265/75R16</b>	123/120M 10	OWL	31.8	10.7	7.5	20/32	S3415/D3086	80
TL28414000	<b>LT275/70R16</b>	112/109Q 6	OWL	31.8	10.8	8.0	20/32	S2470/D2270	50
TL30260000	<b>LT285/75R16</b>	122/119M 8	OWL	33.0	11.7	8.0	20/32	S3305/D3000	65
TL30290000	<b>LT305/70R16</b>	118/115Q 8	OWL	32.9	12.4	9.0	20/32	S2910/D2680	50
TL30300000	<b>LT315/75R16</b>	121Q 8	OWL	34.5	12.8	8.5	20/32	3195	50
TL37302000	<b>LT265/70R17</b>	112/109Q 6	OWL	31.8	10.9	8.0	20/32	S2470/D2270	50
TL37305000	<b>LT265/70R17</b>	119/116Q 8	OWL	31.8	10.9	8.0	20/32	S3000/D2755	65
TL37311000	<b>LT285/70R17</b>	121/118Q 8	OWL	33.0	11.4	8.5	20/32	S3195/D2910	65
TL37500000	<b>LT305/70R17</b>	119/116N 8	OWL	34.0	12.4	9.0	20/32	S3000/D2755	50
TL37800000	<b>LT275/65R18</b>	119/116Q 8	OWL	32.1	10.9	8.0	20/32	S3000/D2755	65
TL13808000	<b>27X8.50R14LT</b>	95Q 6	OWL	26.3	8.8	7.0	19/32	1520	50
TL18524000	<b>30X9.50R15LT</b>	104Q 6	OWL	29.3	9.8	7.5	19/32	1990	50
TL18538000	<b>31X10.50R15LT</b>	109Q 6	OWL	30.3	10.9	8.5	20/32	2271	50
TL18552000	<b>32X11.50R15LT</b>	113Q 6	OWL	31.3	11.6	9.0	20/32	2530	50
TL18562000	<b>33X12.50R15LT</b>	108Q 6	OWL	32.2	12.7	10.0	20/32	2225	35
TL18570000	<b>35X12.50R15LT*</b>	113Q 6	OWL	34.7	13.1	10.0	21/32	2535	35
TL12456900	<b>195R14C</b>	106/104R 8	OWL	26.0	7.9	5.5	17/32	S2095/D1984	65

\*3-ply sidewall

BSW - Black Sidewall    OWL - Outline White Letter    OBL - Outline Black Letter    XL - Extra Load

Sizes may be limited by market.

- Staggered shoulder lugs for added traction on uneven terrain
- Deep tread blocks with large void-ratio tread pattern improves self-cleaning performance in the mud
- Heavy-duty sidewall construction enhances puncture resistance on rough terrain
- Shoulder tread blocks are pinned for studs for extra traction in winter weather
- Three body-ply construction in select sizes
- M&S All-Season rated



Part #	Tire Size	Service Description / Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TL16009000	<b>LT235/75R15</b>	104/101Q 6	OWL	29.0	9.4	6.5	19/32	S1985/D1820	50
TL30186600	<b>LT235/85R16*</b>	120/116N 10	BSW	31.7	9.6	6.5	19/32	S3042/D2778	80
TL30205200	<b>LT245/75R16*</b>	120/116N 10	OWL	30.6	9.8	7.0	19/32	S3040/D2780	80
TL28394000	<b>LT255/85R16</b>	119/116N 8	BSW	33.3	10.3	7.0	19/32	S3000/D2755	65
TL30212900	<b>LT265/75R16</b>	112/109Q 6	OWL	31.8	10.8	7.5	19/32	S2470/D2270	50
TL30212400	<b>LT265/75R16</b>	119/116Q 8	OWL	31.8	10.8	7.5	19/32	S3000/D2755	65
TL30212100	<b>LT265/75R16*</b>	123/120M 10	OWL	31.8	10.6	7.5	19/32	S3415/D3085	80
TL28415400	<b>LT275/70R16</b>	112/109Q 6	OWL	31.3	11.1	8.0	19/32	S2470/D2270	50
TL30268000	<b>LT285/75R16</b>	122/119M 8	OWL	33.0	11.6	8.0	19/32	S3305/D3000	65
TL30291000	<b>LT305/70R16</b>	118/115Q 8	OWL	33.0	12.4	9.0	19/32	S2910/D2680	50
TL30303000	<b>LT315/75R16</b>	121Q 8	OWL	34.6	12.8	8.5	19/32	3195	50
TL00028100	<b>LT235/80R17</b>	120/117Q 10	OWL	31.8	9.3	6.5	19/32	S3086/D2833	80
TL37200200	<b>LT245/70R17</b>	114/110Q 8	OWL	30.8	9.7	7.0	19/32	S2600/D2335	65
TL37200400	<b>LT245/70R17</b>	119/116Q 10	OWL	30.8	9.7	7.0	19/32	S3000/D2756	80
TL00005100	<b>LT255/65R17</b>	114/110Q 8	OWL	30.2	10.3	7.5	20/32	S2600/D2335	65
TL37309000	<b>LT265/70R17</b>	118/115Q 8	OWL	31.8	10.8	8.0	19/32	S2910/D2680	65
TL37309200	<b>LT265/70R17*</b>	121/118Q 10	OWL	31.8	10.8	8.0	19/32	S3195/D2910	80
TL37604000	<b>LT275/70R17</b>	120/117Q 8	OWL	32.2	11.1	8.0	19/32	S3082/D2835	65
TL37600200	<b>LT285/70R17</b>	121/118Q 8	OWL	33.0	11.7	8.5	19/32	S3195/D2910	65
TL37505000	<b>LT305/70R17</b>	119/116N 8	OWL	34.0	12.2	9.0	21/32	S3000/D2755	50
TL37620200	<b>LT275/65R18</b>	119/116Q 8	OWL	32.1	11.0	8.0	20/32	S3000/D2755	65
TL37622000	<b>LT275/70R18*</b>	125/122Q 10	OWL	33.4	11.1	8.0	19/32	S3640/D3305	80
TL00064100	<b>LT285/75R18</b>	129/126Q 10	OWL	35.1	11.3	8.0	19/32	S4080/D3750	80
TL00062100	<b>LT325/65R18</b>	127/124Q 10	OWL	34.8	13.0	9.5	21/32	S3860/D3525	50
TL00058100	<b>LT275/65R20</b>	126/123Q 10	OWL	34.3	11.0	8.0	20/32	S3750/D3420	80
TL00063100	<b>LT305/55R20</b>	121/118Q 10	BSW	33.5	12.5	9.5	19/32	S3200/D2910	65
TL00032100	<b>LT325/60R20</b>	121/118Q 8	BSW	35.6	13.6	9.5	21/32	S3200/D2910	50
TL13804000	<b>27X8.50R14LT</b>	95Q 6	OWL	26.3	8.8	7.0	19/32	1520	50
TL18528000	<b>30X9.50R15LT</b>	104Q 6	OWL	29.9	9.7	7.5	20/32	1985	50
TL18529400	<b>31X10.50R15LT</b>	109Q 6	OWL	30.6	11.0	8.5	21/32	2270	50
TL18557000	<b>32X11.50R15LT</b>	113Q 6	OWL	31.9	11.6	9.0	21/32	2535	50
TL18565000	<b>33X12.50R15LT</b>	108Q 6	OWL	32.9	12.7	10.0	21/32	2205	35
TL18573000	<b>35X12.50R15LT*</b>	113Q 6	OWL	34.6	13.0	10.0	21/32	2535	35
TL00010100	<b>35X12.50R17LT*</b>	119Q 8	OWL	35.0	12.7	10.0	21/32	3000	50

\*3-ply sidewall

BSW - Black Sidewall    OWL - Outline White Letter    OBL - Outline Black Letter    XL - Extra Load

Sizes may be limited by market.

- Aggressive, directional tread design provides excellent dry and wet handling stability on all types of terrain
- Multi-curve tread siping improves traction on loose dirt while enhancing braking and driving performance
- Unique tread element arrangement ensures a uniform tread contact area for sure-footed handling
- Multi-stage staggered shoulder pattern provides improved control even on the most difficult off-road and rocky terrain
- Nylon belt-reinforced tire construction improves puncture resistance and prolongs tread life



Radial

Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TL16009200	LT235/75R15	104/101Q 6	BSW	29.0	9.4	6.5	19/32	S1985/D1820	50
TL22204000	205/70R15C	104/102R 6	BSW	26.4	8.3	6.0	16/32	S1985/D1875	55
TL22205000	205R16C	110/108Q 8	BSW	28.9	8.1	6.0	17/32	S2337/D2205	65
TL18527000	30X9.50R15LT	104Q 6	BSW	29.9	9.8	7.5	20/32	1985	50
TL18533800	31X10.50R15LT	109Q 6	BSW	30.6	10.8	8.5	20/32	2270	50
TL18578000	35X12.50R15LT	113Q 6	BSW	34.6	13.1	10.0	21/32	2535	35
TL30007600	35X12.50R16LT	121Q 8	BSW	34.6	13.0	10.0	21/32	3195	50
TL30026000	37X12.50R17LT	124Q 8	BSW	36.9	13.0	10.0	21/32	3525	50
TL00007100	40X13.50R17LT	121Q 6	BSW	39.8	14.2	11.0	21/32	3195	35
TL00061100	33X13.00R18LT	124Q 10	BSW	33.6	13.0	9.5	21/32	3525	65
TL00057100	35X13.00R18LT	127Q 10	BSW	34.6	13.1	9.5	21/32	3858	65
TL00008100	40X13.50R18LT	129Q 8	BSW	39.8	14.0	11.0	21/32	4080	50
TL00059100	33X12.00R20LT	121Q 10	BSW	33.1	12.2	9.5	21/32	3200	65
TL00031100	35X13.00R20LT	121Q 8	BSW	35.0	13.6	9.5	21/32	3200	50
TL00075100	40X15.50R22LT	127Q 8	BSW	39.8	15.4	12.0	21/32	3860	50

- Heavy-duty bias ply construction for excellent durability and tread flexibility
- Multi-curve tread siping improves traction on loose dirt and slippery terrain
- Unique tread element arrangement ensures a uniform tread contact area for maximum road contact
- Aggressive side lug design provides improved side-bite on difficult off-road and rocky terrain
- Nylon belt-reinforced tire construction improves puncture resistance and durability



Bias

Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TL30024700	37X12.50-16LT	124L 8	BSW	37.0	13.4	10.0	23/32	3525	45
TL30025900	37X12.50-17LT	124L 10	BSW	37.0	13.2	10.0	23/32	3525	45
TL00007200	40X13.50-17LT	123L 8	BSW	40.1	14.3	11.0	23/32	3420	45

BSW - Black Sidewall    OWL - Outline White Letter    OBL - Outline Black Letter    XL - Extra Load

Sizes may be limited by market.

- Heavy-duty bias construction provides lasting performance
- Rugged tread pattern provides agile and controlled steering for competition rock crawling
- Unique multi-edged knob design and arrangement of sipes enhance traction on rock surfaces
- Large shoulder lugs provide unparalleled traction in snow and mud conditions
- Innovative tread pattern provides uniform contact patch for increased performance
- DOT-approved



Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TL28398000	255/85-16LT	104L 8	BSW	33.5	10.0	7.0	23/32	2470	45
TL30006200	35X12.50-15LT	113L 6	BSW	35.0	13.5	10.0	27/32	2535	30
TL30007800	37X12.50-15LT	117L 8	BSW	37.1	13.3	10.0	27/32	2833	45
TL30008000	37X14.50-15LT	127L 8	BSW	37.1	15.3	12.0	27/32	3860	45
TL30009000	38X13.00-15LT	128L 8	BSW	38.2	13.3	10.0	27/32	3970	45
TL30007200	35X12.50-16LT	112L 6	BSW	35.0	13.1	10.0	27/32	2470	30
TL30008200	37X12.50-16LT	124L 8	BSW	36.8	13.4	10.0	27/32	3525	45
TL30008300	37X14.50-16LT	126L 8	BSW	37.0	14.5	12.0	27/32	3750	45
TL30009200	38.5X14.50-16LT	129L 8	BSW	38.8	15.3	12.0	27/32	4080	45
TL23690000	6.50-16LT	100L 6	BSW	30.0	7.9	5.5	19/32	1760	45
TL23691500	7.00-16LT	109L 8	BSW	31.0	8.5	5.5	20/32	2270	45
TL30035000	40X13.50-17LT	123L 8	BSW	40.0	14.0	11.0	27/32	3417	45

**Creepy Crawler** (engineered for competition only)

Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TL30035200	40X13.50-17LT	123L 8	BSW	40.0	14.0	11.0	27/32	3417	45

BSW - Black Sidewall    OWL - Outline White Letter    OBL - Outline Black Letter    XL - Extra Load

Sizes may be limited by market.



- Advanced tread compound designed to decrease rolling resistance for improved fuel economy and tread life
- Double steel-belted construction for added strength and vehicle towing stability
- Excellent shock absorption while providing superior load handling performance

Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TL08698000	<b>ST175/80R13</b>	4	BSW	24.1	7.1	5.0	9/32	1100	35
TL08696000	<b>ST175/80R13</b>	6	BSW	24.1	7.1	5.0	9/32	1360	50
TL08896000	<b>ST185/80R13</b>	6	BSW	24.7	7.4	5.0	9/32	1480	50
TL12462000	<b>ST205/75R14</b>	4	BSW	26.1	8.1	5.5	9/32	1430	35
TL12460000	<b>ST205/75R14</b>	6	BSW	26.1	8.1	5.5	9/32	1760	50
TL12461000	<b>ST205/75R14</b>	6	OWL	26.1	8.1	5.5	9/32	1760	50
TL12474000	<b>ST215/75R14</b>	6	BSW	26.7	8.6	6.0	9/32	1870	50
TL12475000	<b>ST215/75R14</b>	6	OWL	26.7	8.6	6.0	9/32	1870	50
TL15700000	<b>ST205/75R15</b>	6	BSW	27.1	8.1	5.5	9/32	1820	50
TL15701000	<b>ST205/75R15</b>	6	OWL	27.1	8.1	5.5	9/32	1820	50
TL15703000	<b>ST205/75R15</b>	8	BSW	27.1	8.1	5.5	9/32	2145	50
TL15712000	<b>ST225/75R15</b>	6	BSW	28.3	8.9	6.0	9/32	2150	50
TL15710000	<b>ST225/75R15</b>	8	BSW	28.3	8.9	6.0	9/32	2540	65
TL15711000	<b>ST225/75R15</b>	8	OWL	28.3	8.9	6.0	9/32	2540	65
TL15713000	<b>ST225/75R15</b>	10	BSW	28.3	8.9	6.0	9/32	2830	80
TL30140000	<b>ST235/80R16</b>	8	BSW	30.8	9.5	6.5	9/32	3000	65
TL30141000	<b>ST235/80R16</b>	10	BSW	30.8	9.5	6.5	9/32	3420	80

BSW - Black Sidewall

OWL - Outline White Letter

OBL - Outline Black Letter

XL - Extra Load

Sizes may be limited by market.





- Specially formulated soft tread compound for excellent traction on snow and ice
- Unique tread pattern design with high-density sipes effectively enhances snow handling and braking performance
- Pinned for studs
- Random pitch arrangement for low noise
- M&S All-Season rated and mountain/snowflake symbol certification



Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TP10015800	<b>155/70R13</b>	75T	BSW	21.6	6.2	4.5	12/32	853	44
TP20542500	<b>175/70R13</b>	82T	BSW	22.8	7.0	5.0	12/32	1047	44
TP14674100	<b>155/65R14</b>	75T	BSW	22.0	6.2	4.5	13/32	853	44
TP14699200	<b>165/65R14</b>	83T XL	BSW	22.4	6.6	5.0	12/32	1074	50
TP15729200	<b>175/65R14</b>	82T	BSW	23.1	7.0	5.0	12/32	1047	44
TP17626700	<b>185/65R14</b>	90T XL	BSW	23.5	7.4	5.5	12/32	1323	50
TP23557200	<b>185/70R14</b>	88T	BSW	24.4	7.4	5.5	12/32	1235	44
TP18299600	<b>175/65R15</b>	88T	BSW	24.0	6.9	5.0	11/32	1235	44
TP18258400	<b>185/55R15</b>	86T XL	BSW	23.0	7.6	6.0	13/32	1168	50
TP18294700	<b>185/60R15</b>	88T XL	BSW	23.7	7.4	5.5	13/32	1235	50
TP18305600	<b>185/65R15</b>	88T	BSW	24.5	7.4	5.5	12/32	1235	44
TP23854900	<b>195/55R15</b>	89T XL	BSW	23.5	7.8	6.0	12/32	1279	50
TP23977300	<b>195/65R15</b>	95T XL	BSW	24.9	7.9	6.0	12/32	1521	50
TP15783300	<b>205/65R15</b>	94T	BSW	25.5	8.3	6.0	13/32	1477	44
TP39609200	<b>195/55R16</b>	87T	BSW	24.5	7.8	6.0	12/32	1201	44
TP39652400	<b>195/60R16</b>	89T	BSW	25.3	7.9	6.0	12/32	1279	44
TP39707200	<b>205/55R16</b>	94T XL	BSW	25.0	8.4	6.5	12/32	1477	50
TP40948300	<b>205/60R16</b>	96T	BSW	25.8	8.2	6.0	13/32	1565	44
TP40903800	<b>215/55R16</b>	97T XL	BSW	25.4	8.9	7.0	13/32	1609	50
TP40972500	<b>215/65R16</b>	98T	BSW	27.1	8.7	6.5	13/32	1653	44
TP40919300	<b>225/55R16</b>	99T XL	BSW	25.7	9.2	7.0	13/32	1709	50
TP42395000	<b>205/50R17</b>	93T XL	BSW	25.2	8.3	6.5	13/32	1433	50
TP42408700	<b>215/55R17</b>	98T XL	BSW	26.4	8.9	7.0	12/32	1653	50
TP42410800	<b>215/60R17</b>	100T XL	BSW	27.2	8.7	6.5	13/32	1764	50
TP39588400	<b>225/45R17</b>	94T XL	BSW	25.0	8.8	7.5	13/32	1477	50
TP41995400	<b>225/50R17</b>	98T XL	BSW	25.9	9.2	7.0	13/32	1653	50
TP42406400	<b>225/55R17</b>	101T XL	BSW	26.9	9.1	7.0	13/32	1819	50
TP42002800	<b>235/45R17</b>	97T XL	BSW	25.4	9.2	8.0	13/32	1609	50
TP42405500	<b>235/55R17</b>	103T XL	BSW	27.3	9.5	7.5	13/32	1929	50
TP43101400	<b>225/40R18</b>	92T XL	BSW	25.1	9.1	8.0	13/32	1389	50
TP43107900	<b>245/40R18</b>	97T XL	BSW	25.7	9.8	8.5	13/32	1609	50

BSW - Black Sidewall

OWL - Outline White Letter

OBL - Outline Black Letter

XL - Extra Load

Sizes may be limited by market.

- Unidirectional SUV tread design
- High-density lateral sipes
- Random pitch arrangement
- Advanced tread compound for improved braking
- Excellent snow traction
- Superior water drainage and snow removal
- M&S All-Season rated and mountain/snowflake symbol certification



Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TP39215000	<b>205/70R15</b>	96H	BSW	26.3	8.2	6.0	12/32	1565	36
TP27027900	<b>235/75R15</b>	109T XL	BSW	28.9	9.5	6.5	12/32	2271	50
TP27060000	<b>255/75R15</b>	110T	BSW	30.0	10.0	7.0	12/32	2337	36
TP39217000	<b>205/80R16</b>	104T XL	BSW	28.8	8.1	5.5	12/32	1984	42
TP40972400	<b>215/65R16</b>	98H	BSW	27.1	8.6	6.5	12/32	1653	44
TP41064200	<b>215/70R16</b>	100T	BSW	27.9	8.7	6.5	12/32	1764	36
TP00195100	<b>225/70R16</b>	107H XL	BSW	28.4	8.9	6.5	12/32	2149	42
TP41019200	<b>225/75R16</b>	104H	BSW	29.4	8.6	6.0	12/32	1984	36
TP00111100	<b>235/70R16</b>	106H	BSW	29.1	9.4	7.0	12/32	2094	36
TP41102500	<b>245/70R16</b>	107H	BSW	29.5	9.8	7.0	12/32	2149	36
TP00204100	<b>255/65R16</b>	109H	BSW	29.1	10.2	7.5	12/32	2265	44
TP41105700	<b>265/70R16</b>	112H	BSW	30.6	10.7	8.0	13/32	2469	36
TP00181100	<b>215/60R17</b>	96H	BSW	27.3	8.5	6.5	12/32	1565	44
TP00262100	<b>225/65R17</b>	102H	BSW	28.5	8.8	6.5	12/32	1874	44
TP00369100	<b>225/65R17</b>	106H XL	BSW	28.5	8.8	6.5	12/32	2094	50
TP00044100	<b>235/55R17</b>	103H XL	BSW	27.2	9.5	7.5	12/32	1929	50
TP00530100	<b>235/60R17</b>	102V	BSW	28.5	9.0	6.5	12/32	1875	44
TP42444000	<b>235/65R17</b>	108H XL	BSW	29.0	9.4	7.0	12/32	2205	50
TP43119000	<b>255/60R17</b>	110V XL	BSW	29.1	9.9	7.5	12/32	2337	50
TP41104500	<b>265/65R17</b>	112H	BSW	30.5	10.7	8.0	12/32	2469	44
TP00376100	<b>235/60R18</b>	107H XL	BSW	29.2	9.2	7.0	12/32	2150	44
TP43118000	<b>255/55R18</b>	109V XL	BSW	29.1	10.1	8.0	12/32	2270	50
TP00561100	<b>265/60R18</b>	114V XL	BSW	28.5	9.0	6.5	13/32	2601	50
TP00570100	<b>255/50R19</b>	107V XL	BSW	27.2	9.6	7.5	12/32	2150	50

BSW - Black Sidewall

OWL - Outline White Letter

OBL - Outline Black Letter

XL - Extra Load

Sizes may be limited by market.

- Unidirectional tread design
- Pinned for studs
- Rigid tread blocks enhance grip and handling
- Toothed sipe design for grip
- Advanced tread compound
- Random pitch arrangement for low noise
- M&S All-Season rated and mountain/snowflake symbol certification



Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TP27027700	<b>235/75R15</b>	105T	BSW	28.9	9.3	6.5	13/32	2039	44
TP41064600	<b>215/70R16</b>	100T	BSW	27.8	8.6	6.5	13/32	1764	44
TP41016100	<b>225/70R16</b>	103T	BSW	28.4	8.9	6.5	13/32	1929	44
TP41082800	<b>235/70R16</b>	106T	BSW	29.0	9.3	7.0	13/32	2094	44
TP41085000	<b>235/75R16</b>	108T	BSW	29.8	9.3	6.5	13/32	2205	44
TP41101300	<b>245/70R16</b>	111T XL	BSW	29.5	9.6	7.0	13/32	2403	50
TP41021600	<b>255/70R16</b>	111T	BSW	30.1	10.0	7.5	13/32	2403	44
TP41104800	<b>265/70R16</b>	112T	BSW	30.6	10.6	8.0	13/32	2469	44
TP41108600	<b>275/70R16</b>	114T	BSW	31.2	10.9	8.0	13/32	2601	44
TP41435000	<b>225/60R17</b>	103T XL	BSW	27.6	8.9	6.5	13/32	1929	50
TP25716000	<b>225/65R17</b>	102T	BSW	28.6	8.9	6.5	13/32	1874	44
TP42449000	<b>235/65R17</b>	108T XL	BSW	29.1	9.3	7.0	13/32	2205	50
TP37100400	<b>245/65R17</b>	111T XL	BSW	29.5	9.8	7.0	13/32	2403	50
TP42032200	<b>255/55R17</b>	108T XL	BSW	28.1	10.2	8.0	13/32	2205	50
TP47104600	<b>265/65R17</b>	116T XL	BSW	30.6	10.7	8.0	13/32	2756	50
TP42044200	<b>275/55R17</b>	113T XL	BSW	28.9	10.9	8.5	13/32	2535	50
TP43024200	<b>225/60R18</b>	104T XL	BSW	28.6	9.0	6.5	13/32	1984	50
TP43141000	<b>225/65R18</b>	107T XL	BSW	29.5	9.0	6.5	13/32	2149	50
TP43025000	<b>235/55R18</b>	104T XL	BSW	28.3	9.5	7.5	13/32	1984	50
TP43031000	<b>235/60R18</b>	107T XL	BSW	29.1	9.3	7.0	13/32	2149	50
TP43118200	<b>255/55R18</b>	109T XL	BSW	29.1	10.2	8.0	13/32	2270	50
TP43158200	<b>255/60R18</b>	112T XL	BSW	30.0	10.1	7.5	13/32	2469	50

BSW - Black Sidewall      OWL - Outline White Letter      OBL - Outline Black Letter      XL - Extra Load

Sizes may be limited by market.

- High number of sipes
- Random pitch arrangement
- Advanced tread compound formulation
- Excellent snow traction
- Outstanding traction and quick braking
- Superior water drainage and snow removal
- M&S All-Season rated and mountain/snowflake symbol certification



Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TL08007000	<b>165R13C</b>	91/89R 6	BSW	23.5	6.5	4.5	14/32	S1355/D1280	50
TL00182000	<b>175R14C</b>	99/98P 8	BSW	25.0	7.0	5.0	9/32	S1709/D1653	65
TL12425000	<b>185R14C</b>	102/100R 8	BSW	25.6	7.5	5.5	14/32	S1875/D1765	65
TL12457000	<b>195R14C</b>	106/104R 8	BSW	26.2	7.9	5.5	14/32	S2095/D1985	65
TL12458800	<b>205R14C</b>	109/107R 8	BSW	27.0	8.3	5.5	14/32	S2270/D2149	65
TL12340000	<b>165/70R14C</b>	89/87R 6	BSW	23.2	6.7	5.0	10/32	S1279/D1201	54
TL12370000	<b>175/65R14C</b>	90/88T 6	BSW	23.0	6.9	5.0	11/32	S1323/D1235	55
TL12400000	<b>185/60R15C</b>	94/92T 6	BSW	23.6	7.6	5.5	11/32	S1475/D1390	54
TL12500000	<b>195/70R15C</b>	104/102R 8	BSW	25.8	7.8	6.0	14/32	S1985/D1875	65
TL12602000	<b>205/65R15C</b>	102/100T 6	BSW	25.5	8.3	6.0	12/32	S1875/D1765	54
TL12517000	<b>205/70R15C</b>	106/104R 8	BSW	26.3	8.2	6.0	14/32	S2095/D1985	65
TL15814000	<b>215/70R15C</b>	109/107R 8	BSW	26.9	8.7	6.5	14/32	S2270/D2150	65
TL15826000	<b>225/70R15C</b>	112/110R 8	BSW	27.4	9.0	6.5	15/32	S2470/D2335	65
TL22116200	<b>185/75R16C</b>	104/102R 8	BSW	27.0	7.4	5.0	14/32	S1984/D1874	69
TL22118000	<b>195/60R16C</b>	99/97T 6	BSW	25.2	8.0	6.0	11/32	S1709/D1609	54
TL22101000	<b>195/65R16C</b>	104/102T 8	BSW	26.0	8.0	6.0	11/32	S1985/D1875	69
TL22125200	<b>195/75R16C</b>	107/105R 8	BSW	27.5	7.8	5.5	14/32	S2150/D2040	65
TL22118200	<b>205/60R16C</b>	100/98T 6	BSW	25.6	8.2	6.0	12/32	S1765/D1655	55
TL22103000	<b>205/65R16C</b>	107/105T 8	BSW	26.5	8.2	6.0	12/32	S2150/D2040	69
TL22217000	<b>205/75R16C</b>	110/108R 8	BSW	28.1	8.0	5.5	14/32	S2335/D2205	69
TL22217600	<b>215/60R16C</b>	103/101T 6	BSW	26.1	8.5	6.5	12/32	S1929/D1819	69
TL22107000	<b>215/65R16C</b>	109/107T 8	BSW	27.1	8.7	6.5	12/32	S2270/D2150	69
TL22214800	<b>215/75R16C</b>	113/111R 8	BSW	28.7	8.5	6.0	14/32	S2540/D2405	65
TL22112400	<b>225/65R16C</b>	112/110R 8	BSW	27.5	8.9	6.5	13/32	S2470/D2335	69
TL15827000	<b>235/65R16C</b>	115/113R 8	BSW	28.0	9.5	7.0	13/32	S2680/D2535	69
TL15828000	<b>285/65R16C</b>	128N 10	BSW	30.6	11.7	8.5	15/32	3970	76
TL28415200	<b>LT275/70R16</b>	112/109R 6	BSW	31.2	10.8	8.0	14/32	S2470/D2270	54
TL18545000	<b>31X10.50R15LT</b>	109S 6	BSW	30.6	10.8	8.5	17/32	2270	50

BSW - Black Sidewall      OWL - Outline White Letter      OBL - Outline Black Letter      XL - Extra Load

Sizes may be limited by market.



- Unidirectional tread design
- Pinned for studs
- Rigid tread blocks enhance grip and handling
- Toothed sipe design for grip
- Advanced tread compound
- Random pitch arrangement for low noise
- M&S All-Season rated and mountain/snowflake symbol certification



Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TL12381200	<b>165/70R14C</b>	89/87Q 6	BSW	23.2	6.6	5.0	11/32	S1280/D1201	54
TL12371000	<b>175/65R14C</b>	90/88Q 6	BSW	23.0	7.0	5.0	11/32	S1320/D1235	54
TL12425200	<b>185R14C</b>	102/100Q 8	BSW	25.6	7.3	5.5	14/32	S1875/D1765	65
TL12457400	<b>195R14C</b>	106/104Q 8	BSW	26.2	7.8	5.5	14/32	S2095/D1985	65
TL12458400	<b>205R14C</b>	109/107Q 8	BSW	27.0	8.2	6.0	14/32	S2265/D2150	65
TL12507000	<b>195/70R15C</b>	104/102Q 8	BSW	25.8	7.8	6.0	14/32	S1985/D1875	65
TL12604000	<b>205/65R15C</b>	102/100Q 6	BSW	25.6	8.2	6.0	14/32	S1875/D1765	54
TL12519000	<b>205/70R15C</b>	106/104Q 8	BSW	26.3	8.2	6.0	14/32	S2095/D1985	65
TL15816000	<b>215/70R15C</b>	109/107Q 8	BSW	26.9	8.6	6.5	14/32	S2265/D2150	65
TL15825700	<b>225/70R15C</b>	112/110Q 8	BSW	27.4	8.9	6.5	14/32	S2470/D2335	65
TL22119400	<b>195/60R16C</b>	99/97Q 6	BSW	25.2	7.9	6.0	14/32	S1710/D1610	54
TL22101400	<b>195/65R16C</b>	104/102Q 8	BSW	26.0	7.8	6.0	14/32	S1985/D1875	69
TL22125400	<b>195/75R16C</b>	107/105Q 8	BSW	27.5	7.7	5.5	14/32	S2150/D2040	69
TL22118400	<b>205/60R16C</b>	100/98Q 6	BSW	25.7	8.2	6.0	14/32	S1765/D1655	54
TL22105000	<b>205/65R16C</b>	107/105Q 8	BSW	26.5	8.2	6.0	14/32	S2150/D2040	69
TL22206000	<b>205R16C</b>	110/108Q 8	BSW	29.0	8.2	6.0	14/32	S2335/D2150	65
TL22118600	<b>215/60R16C</b>	108/106Q 8	BSW	26.1	8.7	6.5	14/32	S2205/D2094	69
TL22107200	<b>215/65R16C</b>	109/107Q 8	BSW	27.0	8.7	6.5	14/32	S2265/D2150	69
TL22214900	<b>215/75R16C</b>	116/114Q 10	BSW	28.7	8.5	6.0	14/32	S2335/D2150	76
TL22112300	<b>225/65R16C</b>	112/110Q 8	BSW	27.5	9.0	6.5	14/32	S2470/D2335	69
TL15827200	<b>235/65R16C</b>	115/113Q 8	BSW	28.0	9.5	7.0	14/32	S2680/D2535	69

BSW - Black Sidewall

OWL - Outline White Letter

OBL - Outline Black Letter

XL - Extra Load

Sizes may be limited by market.

- Double steel-belted construction for long-lasting treadlife and improved uniformity
- Jointless spiral-wrapped nylon cap ply for added strength and durability
- Continuous shoulder rib design promotes even wear and increased overall tread life
- Heavy-duty sidewall construction delivers responsive handling and durability under demanding commercial applications
- Snow-oriented compound and pattern combine to provide excellent performance in the snow
- Multi-pitch pattern design for minimized pattern noise
- M&S All-Season rated and mountain/snowflake symbol certification



Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TL12390000	<b>165/70R14C</b>	89/87R 6	BSW	23.1	6.5	5.0	11/32	S1279/D1201	54
TL12363200	<b>175R14C</b>	99/98R 8	BSW	25.0	6.9	5.0	12/32	S1709/D1653	65
TL12425600	<b>185R14C</b>	102/100R 8	BSW	25.6	7.5	5.5	11/32	S1875/D1765	65
TL12457300	<b>195R14C</b>	106/104R 8	BSW	26.2	7.8	5.5	13/32	S2095/D1985	65
TL12507400	<b>195/70R15C</b>	104/102R 8	BSW	25.8	7.8	6.0	13/32	S1985/D1875	65
TL12608000	<b>205/65R15C</b>	102/100T 6	BSW	25.5	8.3	6.0	13/32	S1875/D1765	54
TL12515000	<b>205/70R15C</b>	106/104R 8	BSW	26.3	8.2	6.0	13/32	S2095/D1985	55
TL12519600	<b>215/70R15C</b>	109/107R 8	BSW	26.9	8.5	6.5	14/32	S2265/D2150	65
TL15826400	<b>225/70R15C</b>	112/110R 8	BSW	27.4	9.1	6.5	13/32	S2470/D2335	65
TL12506600	<b>195/60R16C</b>	99/97T 6	BSW	25.1	8.0	6.0	11/32	S1709/D1609	54
TL22101300	<b>195/65R16C</b>	104/102T 8	BSW	26.1	7.9	6.0	13/32	S1985/D1875	69
TL12608400	<b>205/65R16C</b>	107/105T 8	BSW	26.5	8.3	6.0	13/32	S2150/D2040	69
TL22107800	<b>215/65R16C</b>	109/107T 8	BSW	27.0	8.7	6.5	13/32	S2265/D2150	69
TL22112200	<b>225/65R16C</b>	112/110T 8	BSW	27.5	9.0	6.5	13/32	S2470/D2335	69
TL15827100	<b>235/65R16C</b>	115/113T 8	BSW	28.0	9.6	7.0	13/32	S2680/D2535	69

BSW - Black Sidewall

OWL - Outline White Letter

OBL - Outline Black Letter

XL - Extra Load

Sizes may be limited by market.

- Innovative, unidirectional tread pattern design for improved all-season performance
- Unique pattern design with full-depth siping for extra traction under wet and snowy conditions
- Open shoulder design for better water evacuation and wet weather handling
- Advanced all-weather tread compound for outstanding winter driving confidence
- Optimal casing design delivers a smooth and comfortable ride
- M&S All-Season rated and mountain/snowflake symbol certification



Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TP39215600	<b>205/70R15</b>	96H	BSW	26.3	8.2	6.0	12/32	1565	44
TP27028600	<b>235/75R15</b>	109T XL	BSW	28.9	9.4	6.5	12/32	2265	50
TP39249000	<b>265/70R15</b>	112H	BSW	29.6	10.7	8.0	10/32	2470	44
TP39217600	<b>205/80R16</b>	104T XL	BSW	28.8	8.2	5.5	12/32	1985	50
TP41063000	<b>215/70R16</b>	100H	BSW	27.9	8.7	6.5	12/32	1764	44
TP41019600	<b>225/75R16</b>	104H	BSW	29.4	8.8	6.0	12/32	1985	44
TP41013800	<b>235/60R16</b>	100V	BSW	27.2	9.3	7.0	11/32	1764	44
TP41083800	<b>235/70R16</b>	109H XL	BSW	29.0	9.4	7.0	12/32	2265	50
TP41107500	<b>245/70R16</b>	111H XL	BSW	29.5	9.7	7.0	12/32	2403	50
TP41222400	<b>255/65R16</b>	109H	BSW	29.2	10.2	7.5	11/32	2265	44
TP41106600	<b>265/70R16</b>	112H	BSW	30.6	10.7	8.0	10/32	2470	44
TP00182000	<b>215/60R17</b>	96H	BSW	27.3	8.5	6.5	11/32	1565	44
TP25719600	<b>225/65R17</b>	102H	BSW	28.5	8.9	6.5	10/32	1875	44
TP42422000	<b>235/55R17</b>	103V XL	BSW	27.3	9.6	7.5	11/32	1929	50
TP42421200	<b>235/55R17</b>	103H XL	BSW	27.3	9.6	8.0	11/32	1929	50
TP42442300	<b>235/65R17</b>	108H XL	BSW	29.1	9.4	7.0	11/32	2205	50
TP42442500	<b>235/65R17</b>	108V XL	BSW	29.1	9.4	7.0	11/32	2205	50
TP41181000	<b>245/65R17</b>	107H	BSW	29.6	9.6	7.0	11/32	2150	44
TP41455000	<b>255/60R17</b>	110V XL	BSW	29.1	10.2	7.5	11/32	2335	50
TP42044300	<b>275/55R17</b>	109H	BSW	28.9	10.8	8.5	12/32	2265	44
TP42044100	<b>275/55R17</b>	109V	BSW	28.9	11.2	8.5	12/32	2265	44
TP43032800	<b>235/60R18</b>	107H XL	BSW	29.1	9.4	7.0	11/32	2150	50
TP43033000	<b>235/60R18</b>	107V XL	BSW	29.2	9.5	7.0	11/32	2150	50
TP43118500	<b>255/55R18</b>	109V XL	BSW	29.1	10.3	8.0	11/32	2265	50

BSW - Black Sidewall

OWL - Outline White Letter

OBL - Outline Black Letter

XL - Extra Load

Sizes may be limited by market.

- Large Block tread design for increased traction and handling under snow conditions
- Unidirectional pattern provides improved snow clearing performance and consistent traction
- Saw-toothed block and high-density sipe arrangement for improved grip on snow and ice
- Multi-Pitch tread design minimizes pattern noise for excellent ride refinement
- Specially formulated compound for excellent traction on snow and ice
- M&S All-Season rated and mountain/snowflake symbol certification



Part #	Tire Size	Service Description /Ply Rating	Side wall	Overall Diameter (in)	Section Width (in)	Rim Width (in)	Tread Depth (in)	Max Load (lbs)	Max PSI
TP39206600	<b>205/70R15</b>	96Q	BSW	26.3	8.2	6.0	-	1565	-
TP26066100	<b>215/70R15</b>	98Q	BSW	26.9	8.6	6.5	-	1653	-
TP27028800	<b>235/75R15</b>	105Q	BSW	28.9	9.5	6.5	14/32	2028	44
TP39249100	<b>265/70R15</b>	112Q	BSW	29.6	10.8	8.0	-	2469	-
TP40983600	<b>215/65R16</b>	98Q	BSW	27.0	8.7	6.5	-	1653	-
TP41072200	<b>215/70R16</b>	100Q	BSW	27.9	8.6	6.5	14/32	1764	44
TP41014800	<b>235/60R16</b>	100Q	BSW	27.1	9.5	7.0	-	1764	-
TP41083300	<b>245/70R16</b>	107Q	BSW	29.7	9.6	7.0	14/32	2149	50
TP00022000	<b>265/70R16</b>	112Q	BSW	30.6	10.8	8.0	14/32	2469	44
TP41108700	<b>275/70R16</b>	114Q	BSW	31.2	11.1	8.0	14/32	2601	44
TP42498400	<b>275/65R17</b>	115Q	BSW	31.1	11.0	8.0	-	2679	-

BSW - Black Sidewall

OWL - Outline White Letter

OBL - Outline Black Letter

XL - Extra Load

Sizes may be limited by market.

When drivers choose Maxxis, they're getting a product designed to deliver safety along with performance. But even the best tires must be driven with caution and with close attention to safe practices. Following the advice below will help to reduce your chance of accident or injury.

Riding on worn tires can cause loss of traction, leading to an accident and possible serious injury.

**Replace your tires when there is only 2/32" of tread depth remaining!**

All DOT-approved tires have a tread-wear indicator bar woven into the tread pattern. While this small piece of rubber appears to be a bridge between the two tire grooves, it is only 2/32" high. When the top of this indicator bar is even with the plane of the tread pattern, **replace your tires.**

Another way to judge this indicator: Stick a penny, head down, in the tread. Seeing the top of Lincoln's head means that you're down to 2/32" and your tires must be replaced.

For optimum safety, especially in wet conditions, replace your tires when you have 4/32" of tread remaining.

Always choose the original size or the size recommended by your vehicle's manufacturer when replacing your tires. **Replacing tires of different speed ratings, sizes, tire aspect ratio, profiles, load capacity and/or footprint or construction could lead to improper tire performance, tire failure, and accident, causing possible serious injury or death.**

If you must use tires of differing profiles, mount the widest tires on the rear of the vehicle.

**Don't mix radial and non-radial tires.** If you mix radial and non-radial tires, you may have trouble with consistent handling. Handling problems can lead to loss of vehicle control, accidents, injuries and death.

**Replace all four tires at once if at all possible.** If you must replace only two, put the newer tires on the rear of the vehicle unless the new tires have a lower speed rating than the front tires.

If you measure the width of your tires, be sure that the tires are mounted on a rim recommended by the Tire and Rim Association (T&RA) at the specified tire pressure.

Depending on a tire's construction, if a tire is mounted on a too narrow or too wide rim, the tire's profile will be changed. The resulting change can unbalance and stress the tire's body, and lead to poor performance, tire failure, accidents, injury and/or death.

**Mounting tires is a job for professionals!**

The energy stored in compressed air makes this task very dangerous for the amateur. **Improperly mounted tires can cause accidents, serious injuries and even deaths.** A dealer or other professional will use the proper tools, safety equipment and procedures to mount your tires. A dealer can also inspect the vehicle, rim, brakes, etc., for any potential problems as well as recommend proper tire inflation, correct positioning and correct tire size. **It's much safer in the long run to pay a dealer or other professional.**

**For professionals mounting Maxxis tires:** Make sure that your tire diameter matches the rim diameter. **Light truck radials should only be mounted on rims approved for that application!**

Maxxis does not recommend the use of bead sealer, as it can inhibit the seating of the bead.

Lubricate beads and tire rim contact surfaces. Lock assembly on mounting machine or place in safety cage. **Step back to avoid possible injury!**

Use only the amount of air pressure necessary to seat the bead.

**Do not** use a volatile substance, a bead sealer or o-ring to help seat the bead.

**Never** use P-metric automotive tires as replacements for light truck tires or on a vehicle equipped with dual-rear tires. Each tire is manufactured with specific speed rating and load requirements to ensure proper vehicle use.

**NEVER RE-INFLATE A FLAT TIRE! NEVER RE-INFLATE A TIRE THAT SHOWS ANY SIGN OF DAMAGE!** Damaged or incorrectly mounted tires can suddenly fail, causing serious injury or death.

**Tires should only be repaired by professionals!** This is no job for an amateur.

Use the tire inspection chart below to look for signs of damage or wear to your tires. If you have the slightest doubt as to damage or wear, have your tires inspected by a professional as soon as possible.

## TIRE ASSESSMENT CHART

**Abnormal Tread Wear**  
Tread wear occurs across the width, or areas of tread wear on the tire. They can also be seen as abnormal tread blocks or cracking in the tread area. The top of wear is usually a mark of brake grinding, excessive steering, alignment problems, an unbalanced tire and/or unevenly inflated tires.

**Shoulder Damage**  
Shoulder damage appears as cuts, tears, scuffs, or cracks anywhere along the shoulder of the tire. This type of damage usually occurs when a tire is run over a road hazard. The cause could include anything from a curb to a hole or piece of metal. Their depth, or very concentrated stresses, usually cause cuts and tears. Scuffs and cracks occur due to impact damage or abnormal wear.

**Tire Separations**  
Separations appear as bulges on the shoulder or tread face, or as feather-like areas along the shoulder region. A groove with deep tire shoulder could be a sign of separation. Separations are usually caused by abnormal heat build-up, excessive tread wear build-up during prolonged high speed driving, over loading or under inflated tire conditions. Separations can also be caused by penetration of water or foreign materials into the carcass of the tire. The tread often shows signs caused by road hazards.

**Road Hazard**  
Road Hazard Damage appears as protruding objects or cuts in the tire. Wipers or impact systems are visible in the tread area, or scuffing that extends around the circumference of the tire. Road hazard damage usually occurs when a sharp object comes in contact with the tire. Moisture and silt can occur to severely under inflated tires, or insufficient clearance between the tire and fender. It can also occur when fuel and oil are overfilled, or there is not enough clearance between the two ends of the assembly.

**Bead Problems**  
Bead Problems appear as a broken bead, scuffing of the rubber around the bead, or a separation of the bead area. A broken bead can occur when a tire is mounted on an improper rim, or because of the mounting. Bead chafing can occur when inflating a tire on a 15% or more inflated rim, or when the tire is at an over-inflated or under-inflated condition. A torn or damaged bead usually occurs when the tire is incorrectly mounted, or excessive stress is applied to the bead area during running.

**MAXXIS**  
maxxis.com

**Avoid irregular tire wear, which can contribute to poor tire performance and tire failure!** Failing to rotate your tires at least every 6000-8000 miles also means that you'll have to replace them much more quickly. Always refer to your owner's manual for the rotation schedule and pattern specific to your vehicle.

Unbalanced tires, which can be caused by hitting curbs, potholes or other road hazards, affect your ride quality and tire life. You can usually detect an unbalanced tire through vibrations in the steering wheel at certain speeds.

If you suspect that your tires may be unbalanced, **have them inspected by a professional as soon as possible** to avoid excessive wear and damage to your vehicle's front end parts.

Improper alignment will affect your car's tire wear, gas mileage, stability and overall performance. Even if you haven't noticed a problem, you should still have your car or truck aligned at least once a year as part of a regular maintenance program.

If you think your vehicle might be out of alignment, your vehicle must be inspected by a professional as soon as possible. **Have your tires inspected immediately if you notice any of warning signs of improper alignment, which include the following:**

Excessive or uneven wear

Steering wheel pulling to the left or right

Feeling of looseness or wandering

Steering wheel vibration or shimmy

Steering wheel isn't centered when car is moving straight ahead

**NEVER OVERLOAD YOUR TIRES!** Overloading can cause a range of problems – everything from poor handling and mileage to failure of vehicle components or tire failure. Tire failure can cause accidents leading to serious injuries and death.

Check your owner's manual to be sure that you're within safety limits for the load your tires can handle. If you're having tires mounted, be sure to check the load limit of the tires to be mounted. The load index of the replacement tires should always meet or exceed the maximum load of the original tires.

**Proper tire inflation is essential!** Your ve-

hicle cannot handle its load without the right amount of air pressure – and the results could be disastrous, including accidents, serious injuries and death. Most tire failures are caused by under-inflation.

Proper inflation is also essential for your vehicle's performance. Unless your tires are properly inflated, you won't get the best gas mileage from your vehicle. In fact, you could lose as much as 5% of your car's optimum mileage by failing to properly inflate your tires.

Check your tire pressure at least once a month, and always check before long trips. Use a tire gauge, and be sure that your tires are still cold when you check them.

If your vehicle still has its original tires, use the optimum pressure specified by the vehicle manufacturer as a guide. If you've replaced your tires, check with your dealer regarding optimum tire pressure.

**REMEMBER: Your tires can be under-inflated long before you can see or feel any change. Don't trust your eyes, and don't trust your vehicle's feel; trust a tire gauge!**

Be sure to check the inflation in your spare tire as well. Spare tires lose air pressure over time. You don't want to discover that your spare tire is under-inflated when you need it most.

You should also periodically replace your spare to prevent damage from aging.

Remember that a mini-spare tire is a temporary fix, and is **NOT** designed to be ridden for long periods of time! **NEVER drive over 50 miles per hour when using a mini-spare tire.** Have a new tire installed as soon as possible.

If you're using winter or snow tires on a front-wheel drive vehicle, have them mounted on all four wheels. Using winter or snow tires only on the front of your front-wheel drive vehicle is extremely dangerous and could lead to handling problems, loss of vehicle control, accident, injury and death.

Keep tires looking their best by cleaning with a mild soap or detergent and a semi-soft bristle brush. Rinse with clean, plain water.

**NEVER SPIN YOUR TIRES!** Being stuck in mud or snow can be frustrating – but if you spin your tires, being stuck can be dangerous. Your tire might be spinning much faster than

your speedometer indicates, causing injury or death as well as damage to your vehicle. A tire spinning off the ground presents an equal or greater hazard. **NEVER STAND BEHIND OR CLOSE TO A SPINNING TIRE!**

**Excess speed is a danger to your tires, your vehicle and your safety!** Driving above the speed limit can stress your tires, leading to sudden tire failure. You can also easily lose control of your vehicle when driving above the speed limit. Always obey posted speed limits for maximum safety.

#### Tire Speed Rating Chart

The rating system shown below displays the top speed for which a tire is certified. It does not indicate the total performance capacity of a tire. This information will not be found on all tires. The speed rating denotes the speed for which a tire was designed to be driven for extended periods.

Rating Symbol	Speed (km/h)	Speed (mph)
B	50	31
C	60	37
D	65	40
E	70	43
F	80	50
G	90	56
J	100	62
K	110	68
L	120	75
M	130	81
N	140	87
P	150	93
Q	160	99
R	170	106
S	180	112
T	190	118
U	200	124
H	210	130
V	240	150
W	270	169
Y	300	188
ZR	Over 240	Over 150



**MAXXIS INTERNATIONAL - UK PLC**  
Carr Rd  
Felixstowe, Suffolk, IP11 3RX, UK  
Tel: 44.08704.282.728  
Fax: 44.08701.126.614

**MAXXIS TECH CENTER - EUROPE B.V.**  
Weverstraat 5  
5405 BM Uden  
The Netherlands  
Tel: 31.413.245801  
Fax: 31.413.245979

**MAXXIS INTERNATIONAL - CANADA**  
400 Chrysler Dr. Unit C  
Brampton, Ontario L6S 5Z5, Canada  
Tel: 905.789.0882  
Fax: 905.789.1507

**MAXXIS INTERNATIONAL - GERMANY**  
Kaddenbusch 31 D-25578  
Dagelling, Germany  
Tel: 49.48.2189.060  
Fax: 49.48.2189.0670

**MAXXIS INTERNATIONAL - USA**

545 Old Peachtree Rd.  
Suwanee, GA 30024, U.S.A  
Tel: 800.4.MAXXIS  
Fax: 770.962.7705

**MAXXIS TECHNOLOGY CENTER - USA**

480 Old Peachtree Rd.  
Suwanee, GA 30024, U.S.A  
Tel: 866.509.7067  
Fax: 770.822.4361

**MAXXIS WHEEL COMPANY - USA**

215 Walt Sanders Memorial Blvd.  
Newnan, GA 30265, U.S.A.  
Tel: 770.502.9992  
Fax: 770.502.1162

**MAXXIS INTERNATIONAL - MIDDLE EAST & AFRICA**

LB15417, 4th Floor, LDB 15  
Jebel Ali Free Zone, Dubai, UAE  
Tel: 971.4.8875354  
Fax: 971.4.8875355

**MAXXIS INTERNATIONAL - THAILAND**

300/1 Moo 1, Tambol Tasith  
Amphur Pluakdaeng  
Rayong Province, 21140, Thailand  
Tel: 66.038.955856  
Fax: 66.038.955712

**MAXXIS INTERNATIONAL - TAIWAN**

8th Fl, World Trade Building  
50, 1st Sec. Shin-Sheng S. Rd.  
Taipei, Taiwan  
Tel: 886.2.2393.7451  
Fax: 886.2.2341.4560

**MAXXIS INTERNATIONAL - JAPAN**

1265-1, Koinaba, Isehara City  
Kanagawa, 259-1122, Japan  
Tel: 81.463.90.2288  
Fax: 81.463.90.2289

**MAXXIS INTERNATIONAL - CHINA**

Cheng Shih Tire (Xiamen) Co., Ltd.  
No. 8 Hefeng Road, Lujia  
Kunshan, Jiangsu P.R. China  
Tel: 86.512.5767.3888  
Fax: 86.512.5767.2342

